

Automobile Manufacturers Association

Consolidated Specification Questionnaire

For 1946 Models

Mechanical Details

Make of Car.....PONTIAC.....Model.....1946-26.....
 Name of Maker.....Pontiac Motor Division.....Address.....190 Oakland Ave., Pontiac, Mich.....
 Date.....October, 1945.....

NOTE: (1) Subject to Correction: It is understood that the following data are subject to correction in the case of cars not in production at the time this completion was requested.

(2) Only standard equipment included in Factory Delivered price should be included in this questionnaire.

ENGINE

No. of cylinders6.....
 Valve arrangement "L" Head
 Bore 3-9/16" Stroke 4"
 Cylinder head, cast iron or aluminumCast Iron.....
 Cylinder sleeve, Yes.....No.....
 Piston displacement239.2.....
 Taxable horsepower30.4.....
 Horsepower rating—

To be based on actual performance corrected to 60°F. at sea level (barometric pressure 29.92 inches of mercury) with standard fuel. (Octane No. of fuel...76.....)

—With Bare Engine—
 Maximum brake hp. 93 1/8 at 3400 R.P.M.

—With Standard Accessories—*
 Maximum brake hp. 87 1/8 at 3200 R.P.M.

*Those standard accessories needed for normal operation including fan, generator, starter, air cleaner, muffler, manifolds, fuel and water pumps.

Maximum torque—
 With bare engine, lb. ft. 186 at 1400 R.P.M.
 With standard accessories,* lb. ft. 186 at 1100 R.P.M.

Compression Ratio—
 Standard 6.5 Optional 7.5

Standard compression pressure —pounds—
 At cranking speed 160
 At what R.P.M. 1000

PISTONS and RINGS

Piston
 MakeOwn.....
 MaterialChrome Nickel Alloy.....
 Features—split skirt, invar strut, oval, tin-plated, aluminum oxide finish, auto-thermic, V-Bridge, porous chrome plate, etc.Electroplated.....
 Weight—ounces—without rings, pin or bushing27.1.....
 Length3.19.....
 Clearance—
 Top land0.0175 to0.0295.....
 Skirt, top0.002 bottom0.002.....

PISTONS and RINGS (cont'd)

Piston ring groove depth—
 Oil19/42 Compression19/22.....
 No. of oil rings used per piston1.....
 Width of oil rings3/16.....
 Width of oil ring gap0.007 to0.017.....
 No. of compression rings used per piston2.....
 Width of compression rings3/32.....
 Width of compression ring gap0.006 to0.013.....
 Maximum wall thickness of oil rings150.....
 Maximum wall thickness of compression rings175.....
 Are ring expanders used, Yes.....No.....X.....

RODS and PINS

Wristpin—
 MaterialGMX-1315-A.....
 Length3.1/16 Diameter15/16.....
 Locked in rod, piston or floatingPiston.....
 Clearance in pistonPress Fit..... to
 Clearance in rod0.0004 to0.0006.....

Connecting rod—
 Length—center to center7.9/16.....
 MaterialGM-1045.....
 Weight—ounces37.....

Crankpin journal—
 Diameter2.1/8 Length1.9/32.....

Lower bearing—
 MaterialBabbitt.....
 Clearance0.0001 to0.0021.....
 End play0.007 to0.030.....
 Ship—solid, laminated or noneNone.....
 Spun or separateSeparate.....
 Rods and pistons removed from above or below.....

CRANKSHAFT

MaterialGM-1045.....
 Weight—stripped86.5.....
 Vibration dampener used—yes or noYes.....
 TypeHarmonic.....

Make of Car.....PONTIAC.....Model.....26.....Date.....1946.....

CRANKSHAFT (cont'd)

Crankshaft counterweights used, number of.....9.....
 Which main bearing takes thrust.....#3.....
 Crankshaft end play......003 .007.....
 Main bearing—
 Type: Cast-in or..... Slip-in..... X
 If slip-in: Removable from below..... Yes
 Necessary to align ream..... No
 Material..... Rabbitt
 Clearance..... .0003 - .0023
 Shim—solid, laminated or none.....
 Main bearing journal diameter x length—
 No. 1..... 2 1/2 x 1 1/2
 No. 2..... 2 17/32 x 1 3/16
 No. 3..... 2 19/32 x 1 1/8
 No. 4..... 2 5/8 x 1 9/16
 No. 5.....
 No. 6.....
 No. 7.....
 No. 8.....
 No. 9.....
 Crankshaft gear or sprocket—
 Make..... Own
 Material..... Case Hardened Steel

CAMSHAFT

Camshaft gear or sprocket—
 Make..... Own
 Material..... Chrome Nickel Alloy Iron
 Timing chain—
 Make..... Morse
 Number of links..... 56
 Width..... 1
 Pitch..... 3/8

VALVES

INTAKE VALVE—

Make..... Optional
 Material..... Optional
 Overall length..... 5 23/32
 Actual overall diameter of head..... 1 19/32
 Minimum port diameter..... 1 3/8
 Angle of seat..... 30°
 Is valve seat an insert?..... No-Taper Guide
 Stem diameter..... 5/16
 Stem to guide clearance..... Free to .0006
 Lift..... 19/64
 Spring pressure and length—
 Outer—

VALVES (cont'd)

With valve closed—lb..... 59 1/2..... ins. 1 29/32
 With valve open—lb..... 101..... ins. 1 19/32
 Length out of engine—ins.....
 Inner—
 With valve closed—lb..... ins.
 With valve open—lb..... ins.
 Length out of engine—ins.....

EXHAUST VALVE—

Make..... Optional
 Material..... Optional
 Overall length..... 5 23/32
 Actual overall diameter of head..... 1 15/32
 Minimum port diameter..... 1 5/16
 Angle of seat..... 45°
 Is valve seat an insert?..... No..... Material..... Taper Guide
 Stem diameter..... 5/16
 Stem to guide clearance..... Free to .0006
 Lift..... 19/64
 Spring pressure and length—
 Outer—
 With valve closed—lb..... 50 1/2..... ins. 1 29/32
 With valve open—lb..... 101..... ins. 1 19/32
 Length out of engine—ins.....
 Inner—
 With valve closed—lb..... ins.
 With valve open—lb..... ins.
 Length out of engine—ins.....

Operating tappet clearance (hot or cold)—intake..... .011-.013
 Tappet clearance for valve timing—intake..... Same
 Operating tappet clearance (hot or cold)—exhaust..... .011 - .013
 Tappet clearance for valve timing—exhaust..... Same
 Hydraulic valve lifters—yes or no..... No

Valve timing—

Intake opens..... 5..... degrees BUDC piston travel..... inches
 Intake closes..... 39..... " ALDC " "..... inches
 Exhaust opens..... 45..... " BLDC " "..... inches
 Exhaust closes..... 5..... " AUDC " "..... inches

Valve Timing Marks—on Flywheel, Vibration Damper, Nose
 Crankshaft & Camshaft Sprockets

LUBRICATION

Lubricating system type—pressure or splash..... Pressure
 Oil pressure to—
 Main bearings—yes or no..... Yes
 Connecting rods—yes or no..... Yes
 Wristpins—yes or no..... Yes
 Camshaft bearings—yes or no..... Yes
 Tappets—yes or no..... No

Make of Car..... PONTIAC Model 1946-26 Date 1946

LUBRICATION (cont'd)

Timing gear or chain lubrication—*positive or splash* **positive**
 Oil pump type **Gear**
 Oil grade recommended—SAE viscosity and temperature range—
 10W -10° to $+95^{\circ}$
 20W or 10 $+10^{\circ}$ to $+110^{\circ}$
 20W or 20 $+32^{\circ}$ to $+110^{\circ}$
 Normal oil pressure—lbs. at M.P.H. 35-40 @ 40 M.P.H.
 Pressure at which relief valve opens
 Capacity of oil reservoir—quarts, dry 6 Qts. refill 5 Qts.
 Oil pressure gauge make A.C.
 Oil reservoir level gauge type blade
 Floating type oil intake—yes or no No
 External oil filter make No
 Other type of oil cleaner **Internal precipitation type**
 Oil cooler make None
 Chassis lubrication—Make **Pressure Gum**

FUEL

Gasoline tank—capacity 17 Gal.
 Fuel feed—
 Type—vacuum tank, electric pump, gravity vacuum
 pump or camshaft pump **Mechanical pump**
 Make A.C. Model
 Carburetor—
 Make **Carter** Model **WAI-537-5**
 Number used **One**
 Size **1 1/4**
 Type—
 Up or down draft **down** Single or dual **single**
 Intake manifold heat control—manual, automatic or none **automatic**
 Automatic choke, make **Carter** Model
 Air cleaner—intake silencer make **AC**
 Type—dry felt; oil bath; oil coated fibre **Oil coated fibre**
 Heavy Duty type—Make **AC** Model
 Muffler make **Optional** straight through type
 Tail pipe diameter **1 3/4**

COOLING

Water pump—
 Type **Cultrifugal**
 Drive **Belt**
 Is pump equipped with packing nut **No**
 Water circulation thermostat make **Harrison**
 Pressure relief valve—yes or no **Yes**
 By-pass for recirculation—yes or no **Yes**
 Radiator core—
 Type **Cellular**
 Make **Harrison**

COOLING (cont'd)

Cooling system—capacity, quarts **18**
 Water jackets full length of cylinders—yes or no **Yes**
 Water all around cylinder—yes or no **Yes**
 Lower radiator hose—
 Inside diameter Length
 Upper radiator hose—
 Inside diameter Length
 Fan belt—
 Make **Optional**
 Angle of vee
 Length, outside Width, maximum
 Fan—
 Make **OWI** No. of Blades **4**

IGNITION

Ignition units—
 Make **Delco Remy** Model **647-D**
 Manual or octane selector, degrees advance 10 retard 10
 Maximum centrifugal advance crankshaft, degrees 25
 at 40 M.P.H. engine R.P.M.
 Inches of Mercury Necessary to operate Vacuum Advance (Plus or
 minus 1 inch) 7-9
 Maximum Vacuum advance crankshaft, degrees 15
 Breaker gap020 Breaker arm tension 17-21 oz.
 Cam angle 37 deg.
 Timing—Breaker points open 2-6 degrees crankshaft rotation
 or inches piston travel (after or before) top center
 with octane selector in the 0 position.
 Timing mark location—flywheel, vibration dampener or none **Flywheel**
 Firing order **153624**
 Amperage draw of ignition coil—
 With engine stopped
 With engine idling
 Spark plug—
 Thread—10 m.m., 14 m.m. or 18 m.m. **14**
 Make **AC** Model **45**
 Gap **.023-.028**
 Ignition cable make **Packard**

BATTERY

Make **Delco** Model **15 E 2-W**
 Capacity—ampere hours 100 @ 20 hour rate
 Number of plates per cell 15
 Bench charging rate—
 Start 7 Finish 7
 Which battery terminal is grounded **negative**
 Location of battery **Under hood**

Make of Car. PONTIAC Model 1946-26 Date 1946

STARTING MOTOR

Make Delco Remy Model 1107032
 Normal engine cranking speed 43 RPM at 0° 10 W. oil
 Brush spring tension 24-28 oz.
 Lock test—
 Amperage draw 525
 Volts 3.37
 Torque in pounds feet 12
 No load test—
 Amperage draw 65
 Volts 5 R.P.M. 5000
 Type of drive—Bendix or sliding gear with overrunning clutch Bendix
 Starting device—Solenoid, manual, etc. Manual
 Starter operation—check items required to start engine
 1. Turn on ignition X
 2. Depress starter pedal X
 3. Depress accelerator pedal X
 4. Depress clutch pedal X
 5. Operate button on dash
 6. Pull out throttle
 Starting motor pinion meshes front or rear rear
 No. of teeth in flywheel
 Face width of flywheel teeth
 Gear ratio between starter armature and flywheel 15.55-1

GENERATOR

Make Delco Remy Model 1102665
 Type—third brush, shunt, etc. Shunt
 Brush spring tension 22-26 oz.
 Current regulator, voltage regulator or current and voltage control unit current & voltage
 Maximum controlled charging rate
 Temperature Hot
 Amperes 32-34
 Voltage 7.2 - 7.4
 R.P.M. 1170
 Cutout relay—
 Voltage at closing 6.2 - 6.7
 Amperes to open, reverse current 0-4
 Air gap .020
 Voltage regulator—
 Volts 7.2 - 7.4
 Temperature Hot
 Air gap .070 - .075
 Current regulator—
 Amperes 32-34
 Temperature Hot
 Air gap .080 - .085
 Car speed for maximum charging rate 25
 Ammeter or charge indicator make A.C.

LAMPS

Lighting switch make Delco Remy
 Are tail and dash lights in series No
 Headlights—
 Make Guide
 Location—in fender, in catwalk, or radiator shell in fender
 Parking or fender light make Guide
 Tail and stop light make Guide
 Horn—
 Type—vibrator or motor Vibrator No. used 2
 Make Delco Remy
 Amperage draw of each 18-21

CLUTCH

Make Inland
 Drive type—
 Direct to flywheel face Yes
 Through fluid flywheel
 Semi-centrifugal
 Power operated unit—make
 Vibration insulation or neutralizer—fabric, rubber blocks or springs Springs
 No. of clutch driving discs None
 No. of clutch driven discs One
 Clutch facing—
 Material—woven or moulded asbestos, cork moulded
 Inside diameter 6
 Outside diameter 9 1/2
 Thickness 1/8
 No. required 2

TRANSMISSION

Transmission—
 Make Own Model
 No. of forward speeds 3
 Manual shift—yes, no Yes
 Automatic or auxiliary shifting mechanism—yes no X
 If yes, Make
 Type—centrifugal, vacuum, electric or hydraulic
 Automatic overdrive—
 Make
 Oil capacity—pints
 Oil grade recommended—S.A.E. viscosity
 Summer Winter
 Gear ratio in high—standard 5-bassenoer
4-door sedan 4.3
 Transmission ratio—
 In overdrive 1.66
 In third Direct In fourth
 In low 2.67 In reverse 3.02

Make of Car.....PONTIAC..... Model26..... Date1946.....

TRANSMISSION (cont'd)

Constant mesh gears on secondYes.....
 Spur or helical gears—
 For second speed
 For first speed
 For reverse speed
 For all speedshelical.....
 Synchronous meshing and third gears
 Transmission oil—
 Capacity—pints1 3/4.....
 Grade recommended—S.A.E. viscosity
 Summer ..EP-80 or 90.. Winter ..EP-80 or 90
 Universal joints—
 MakeMechanics.....
 Number used2.....
 Type—metal with anti-friction X
 bearing or metal with plain bearing
 Lubricated with Semifluid viscous chassis.....
 Drive taken through springs, torque arm, torque tube or lubricant
 radius rodsSprings.....
 Torque taken through springs, torque arm, torque
 tube or radius rodsSprings.....

REAR AXLE

Rear axle—
 MakeOwn..... Model
 Type—Semi, full or three-quarter floating Semi-floating.....
 Minimum road clearance under center of rear
 axle—tires inflated8 3/8.....
 Rear axle oil—
 Capacity—pints3 1/2.....
 Grade and type recommended—S.A.E. viscosity
 All year CO Pass. Car duty Hypoid
 Type of gearing—spiral bevel, worm, hypoid.....Hypoid.....
 Gear ratio—standard 5-passenger 4-door sedan4.3.....
 Optional gear ratios2.9 & 4.55.....
 Number of teeth—
 In ring gear13..... In pinion10.....
 How is pinion adjusted—screw or shims.....Shims.....
 How is pinion bearing adjusted—screw or shims.....None.....
 Are pinion bearings carried in sleeveYes.....
 Backlash between pinion and ring gear .003.....to......012.....

TIRES and WHEELS

Tires—
 MakeOptional.....
 Size 16 x 6.50 No of plies..4.....

TIRES and WHEELS (Cont'd)

Inflation pressure—Front ..30 Cold.. Rear ..30 cold..
 Rim—Diameter 16..... Width ..5".....

SPRINGS

FRONT SPRING—

Independent or conventional suspensionIndependent.....
 Type—coil, semi-elliptic, transverse, torsionCoil.....
 MakeOwn.....
 MaterialGM 9260 M.....
 Torsional stabilizer at frontYes.....
 If leaf—
 Length Width
 Number of leaves—5-passenger, 4-door sedan.....
 Are radius rods used on axle.....
 If coil—
 Free length
 Length under curb weight

REAR SPRING—

Independent or conventional suspension Conventional.....
 Type—coil, semi-elliptic, transverse, torsion ..semi-elliptic.....
 MakeOwn.....
 MaterialG.M. 9255.....
 Torsional stabilizer at rearNo.....
 If leaf—
 Length52..... Width2.....
 Number of leaves—5-passenger, 4-door sedan ..8.....
 Spring leaves lubricated with ...Chassis Lubricant.....
 Spring cover, Yes ...Yes..... No
 Spring shackles—
 Front—Type Make
 Rear—Type ..Threaded..... Make
 Spring bolts—
 Type Threaded.....
 If coil—
 Free length
 Length under curb weight
 Rate for above pounds per inch.....
 Shock absorbers—
 MakeDelco Lovejoy.....
 Type, one way with lever, two way with lever, or direct acting
 Front2 way.....
 RearDirect acting.....
 Fluid capacity (oz.)—front rear 6 3/4 oz.....

Make of Car.....PONTIAC.....Model26.....Date1946.....

STEERING

Steering gear—
 Type **Worm & Roller**
 Make **Saginaw** Model
 Ratio **19.1**
 Lubricant recommended **All season steering gear**
 Steering wheel diameter **18**
 Drag link longitudinal or transverse **transverse**
 Tie rod—one or two **2**
 Is intermediate steering arm used **Yes**
 Number of turns of steering wheel for full left
 to right swing of wheels
 Car turning radius—feet—right, left or both. **20**
 Caster—degrees **1/2** **1**
 Camber—degrees or **+ 1/4** inches **1/4**
 Toe-in—inches **0** **1/16**
 Crosswise inclination of kingpin—degrees **4 3/8** - **4 7/8**
 Front axle—
 Make Model
 Section type—**I-beams, tubular or none**
 End type—**Elliott or reverse Elliott**
 Minimum road clearance—tires inflated.... **8.15/16**

BRAKES

Foot brakes—
 † Make **Bendix Duo-Servo**
 Type of mechanism, **hydraulic or mechanical**... **hydraulic**
 If vacuum booster is standard, state make
 Brake lining moulded, semi-moulded or woven—
 Primary shoe **moulded**
 Secondary shoe **moulded**
 Drum—
 Material **Steel & cast iron** Drum diameter **11"**
 Lining—
 Length per wheel **21 5/16"**

BRAKES (cont'd)

Width **F-2"** R **1 3/4"** Thickness **3/16"**
 Clearance—see **See brake chart**
 Total foot braking area ... **159 sq. in.**
 Percent braking power on rear wheels..... **44**
 Hand lever operates on—**transmission, separate rear brakes, rear service brakes or all four service brakes**..... **rear service** ..
 Hand brake, if separate from service brake—
 Internal or external
 Drum diameter
 Lining—
 Length per drum
 Width Thickness
 Clearance

FRAME and OTHER GENERAL DATA

Frame—
 Depth—maximum **6 1/2**
 Thickness—maximum **7/64**
 Flange width—maximum **2 1/2**
 Wheelbase **122**
 Tread—
 Front **58**
 Rear **61 1/2**
 Weight of standard 5-passenger, four-door sedan—
 Shipping **3530** Estimated
 Curb **3672** Estimated
 Price of standard 5-passenger, 4-door sedan
 First serial number, this series **P6LB.1001**
 Serial number location **left front side dash**
 Overall length of car—
 With bumpers and bumper guards **210 1/4**
 Overall width of car **76 3/4**
 Overall height, road to roof with no load **65 1/4**

Make of Car PONTIAC Model 1946-26 Date 1946

NOTE—In giving bearing dimensions, kindly use the following order: inside diameter, outside diameter and width. Where cup and cone bearings are used, give both cup and cone numbers.

BEARINGS

Water pump bearing—
 Make or type New Departure
 Size or number 954210

Fan bearing—
 Make or type
 Size or number

Starting motor commutator end bearing—
 Make or type Plain
 Size or number I.D. 9/16 Length 15/16

Starting motor drive end bearing—
 Make or type
 Size or number

Starting motor outboard bearing—
 Make or type Bronze Bushing
 Size or number $\frac{1}{2}$ x 9/16 x 25/32

Generator commutator end bearing—
 Make or type Bronze Bushing
 Size or number 9/16 x 25/32 x 53/64

Generator drive end bearing—
 Make or type New Departure
 Size or number 903203

Transmission main drive gear front pilot bearing—
 Make or type New Departure
 Size or number 907109

Clutch throwout bearing—
 Make or type New Departure
 Size or number 2140122

Transmission main drive gear rear bearing—
 Make or type New Departure
 Size or number 954114

Transmission main shaft front pilot bearing—
 Make or type Rollers
 Size or number 14-7/32 x 17/32

Transmission main shaft rear bearing—
 Make or type New Departure
 Size or number 907506

Transmission countershaft front bearing—
 Make or type Rollers
 Size or number 25 - 1/8 x 13/16

Transmission countershaft rear bearing—
 Make or type Rollers
 Size or number 25 1/8 x 13/16

Transmission reverse idler bearing—
 Make or type Plain Bronze Bushing

BEARINGS (cont'd)

Size or number 55/64 x 63/64 x 3/4

Overdrive shaft rear bearing—
 Make or type
 Size or number

Overdrive shaft pilot bearing—
 Make or type
 Size or number

Main shaft extension bearing—
 Make or type
 Size or number

Rear axle pinion shaft front bearing—
 Make or type New Departure
 Size or number 905306

Rear axle pinion shaft rear bearing—
 Make or type Hyatt
 Size or number 107391

Differential right bearing—
 Make or type Hyatt Taper Roller
 Size or number 179243

Differential left bearing—
 Make or type Same
 Size or number

Rear wheel inner bearing—
 Make or type
 Size or number

Rear wheel outer bearing—
 Make or type New Departure
 Size or number 954172

Front wheel inner bearing—
 Make or type New Departure
 Size or number 909052

Front wheel outer bearing—
 Make or type New Departure
 Size or number 909001

Kingpin upper bearing—
 Make or type Bronze Bushing
 Size or number 55/64 x 1 1/16 x 1 15/64

Kingpin lower bearing—
 Make or type Same
 Size or number

Kingpin thrust bearing—
 Make or type Ball
 Size or number 230679


Make of Car.....PONTIAC..... Model1946-26..... Date ..1946.....

NOTE: (1) List only that equipment which is included in the factory delivered price. Special equipment which is fitted, but not included in the factory delivered price should be listed with its additional price.
 (2) Enter on top line your own model name, or series mark corresponding to Standard, DeLuxe or Custom.

EQUIPMENT	Models		
	Standard	DeLuxe	Custom
Catalog Designation of Model	Torpedo.....
Lacquer make	Duco.....
Body finish, lacquer or synthetic enamel.....	Lacquer.....
Fender finish, lacquer or synthetic enamel.....	Lacquer.....
Hardware make	Ternstedt.....
Speedometer make	Ac.....
Gasoline gauge make	AC.....
Thermometer make	AC.....
Car lock make	Rochester.....
Car lock operates on ignition or ignition and steering.....	Ignition.....
Clock make JAGGER.....mechanical or electrical.....	electrical.....
Cigar lighter makeCASCO.....
Safety glass make	LOF Plate.....
Safety glass type, laminated or tempered.....	Laminated.....
In windshield	Yes.....
In side windows	Yes.....
In rear window	Tempered.....
Bumper make	General Spring & Bumper Co.....
Bumper guard make	Brown, Lips, Chapin, Div.....
Car heater make Own.....Type Underseat.....
Direction signal make Guidelamp.....
Front-yes or no.....Rear-yes or no.....
No. of tail lights included	2.....
No. of visors included	2.....
No. of horns included	2.....
No. of windshield wipers included	2.....
No. of spare tires included

Make of Car.....PONTIAC.....Model 1946-26.....Date 1946.....

BODY DIMENSIONS (Five-Passenger, Four-Door Sedan)

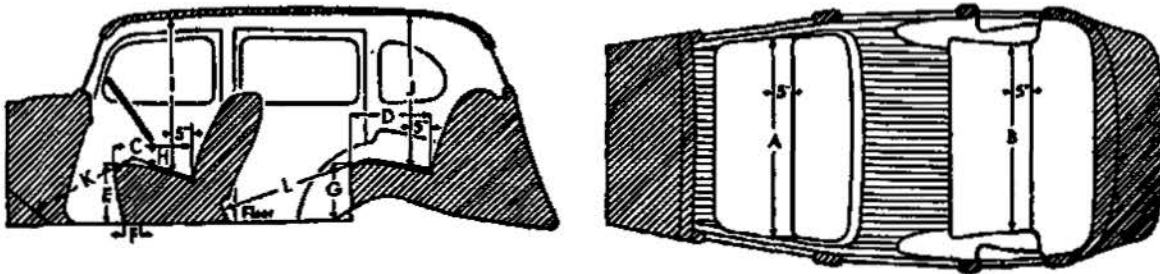

INTERIOR

All interior body dimensions taken with front seat in its rear position

Width of front seat cushion, measured 5 inches from back (A)	60 $\frac{1}{2}$
Width of rear seat cushion, measured 5 inches from back (B)	51
Depth of front seat cushion (C)	18 $\frac{1}{4}$
Depth of rear seat cushion (D)	20
Height of front seat cushion measured 12 $\frac{1}{2}$ inches from center line of body (E)	17 $\frac{1}{4}$
Front seat horizontal adjustment, inches (F)	4 $\frac{1}{2}$
Front seat vertical adjustment, inches	3 $\frac{1}{4}$
Height of rear cushion measured 12 $\frac{1}{2}$ inches from center line of body (G)	13
Vertical distance steering wheel and seat cushion (H)	6 $\frac{3}{8}$
Head room at front seat, measured 5 inches from back (I)	36 $\frac{1}{2}$
Head room at rear seat, measured 5 inches from back (J)	36
Leg room in front seat, measured from 6 inches up on toe board, following contour of seat cushion (K)	42 $\frac{1}{2}$
Leg room in rear seat, measured from center of foot rest, following contour of seat cushion (L)	42 $\frac{1}{2}$
Trunk capacity, cubic feet	20 $\frac{1}{2}$
Width of left front pillar on diagonal with door closed	4 $\frac{15}{32}$

Make of Car... PONTIAC ... Model ... 1946-26 ... Date ... 1946

BODY DETAIL AND EQUIPMENT FORMS

DIRECTIONS

Only standard equipment included in the Factory Delivered price shown in column 3 should be listed on this sheet. Please arrange body types in an ascending price scale with the lowest priced type at the top and the highest priced type at the bottom.

IMPORTANT—To save your time, where an item is common to several types, use arrows to indicate the fact as shown in diagrams.

Standard abbreviations may be used where space limitations make this necessary. Where sub-headings such as those shown in column for Body Make are identified with numerals, these numerals may be used in filling in form.

Diagram showing relationships between Make, Body Model, and Body Make. It includes columns for 'Make' (Crested 6-66, Crested 6-68), 'Body Model' (Roadster, Phaeton, Four-door sedan, Four-door sedan, Coupe, Coupe with rumble, Cabriolet), and 'Body Make' (Fisher, Murray, Fisher, Budd, Fleetwood, LaSalle).

Main specification table with columns: MAKE AND MODEL, BODY TYPE (List Types on Ascending Price Scale Beginning with the Lowest Price), Factory Delivered Price Including Federal Tax and Handling Charge, Number of Passengers, Wheel-base, Shipping Weight, Seating Arrangement Number (See Below), and Body Make. Includes entries for STREAMLINER Sedan Coupe, 4-door sedan, and Station Wagon.

SEATING ARRANGEMENT NUMBERS

- 1—Two-door car with no rear seat.
2—Two-door car with rumble seat.
3—Two-door car with conventional rear cushion.
4—Four-door car with cushions front and rear.
5—Four-door car with cushions front and rear plus two auxiliary seats folding into front seat back.

- 6—Two-door car with two opera seats folding into sides of body.
7—Two-door car with two opera seats folding into rear of body.
8—Two-door car with one opera seat folding into rear of body and other seat stationary.
9—Two-door car with rear stationary seat for one passenger.