

Automobile Manufacturers Association

Consolidated Specification Questionnaire

For 1949 Models

Mechanical Details

Make of Car PONTIAC SILVER STREAK Model 1949-27

Name of Maker Pontiac Motor Division Address Pontiac, Michigan

Date February 10, 1949..

NOTE: (1) Subject to Correction: It is understood that the following data are subject to correction in the case of cars not in production at the time this compilation was requested.

(2) Only standard equipment included in Factory Delivered price should be included in this questionnaire.

ENGINE

No. of cylinders 8
 Valve arrangement "I" Head
 Bore 3-1/4" Stroke 3-3/4"
 Cylinder head, cast iron or aluminum Cast Iron
 Cylinder sleeve, Yes No No
 Piston displacement 248.9
 Taxable horsepower 33.8

Horsepower rating—

To be based on actual performance corrected to 60°F. at sea level (barometric pressure 29.92 inches of mercury) with standard fuel. (Octane No. of fuel 76 ...)

—With Bare Engine—

Maximum brake hp. 104 at 3800 R.P.M.

—With Standard Accessories—*

Maximum brake hp. at R.P.M.

*Those standard accessories needed for normal operation including fan, generator, starter, air cleaner, muffler, manifolds, fuel and water pumps.

Maximum torque—

With bare engine, lb. ft. 190 at 2200 R.P.M.

With standard accessories,* lb. ft. at R.P.M.

Compression Ratio—

Standard 6.5 Optional 7.5

Standard compression pressure —pounds—

At cranking speed 158# sq. in.

At what R.P.M. 1000

PISTONS and RINGS

Piston

Make Own

Material Chrome Nickel Alloy

Features—split skirt, invar strut, oval, tin-plated, aluminum oxide finish, auto-thermic, V-Bridge, porous chrome plate, etc. Tin Plated

Weight—ounces—without rings, pin or bushing 1.54#

Length 3-19/32"

Clearance—

Top land0165 to0284

Skirt, top bottom

Fit to give 10-20 pounds pull on

1/2" x .0015 feeler

PISTONS and RINGS (cont'd)

Piston ring groove depth—

Oil188 Compression168

No. of oil rings used per piston 1

Width of oil rings 3/16"

Width of oil ring gap007 - .017

No. of compression rings used per piston 2

Width of compression rings 3/32"

Width of compression ring gap008 - .015

Maximum wall thickness of oil rings150

Maximum wall thickness of compression rings150

Are ring expanders used, Yes No X

RODS and PINS

Wristpin—

Material SAE 1117 (Fine Grain)

Length 2-7/8" Diameter 15/16"

Locked in rod, piston or floating Locked in piston

Clearance in piston Press. Fit to

Clearance in rod0004 to0006

Connecting rod—

Length—center to center 7-9/16"

Material SAE #1035

Weight—ounces 32.0 oz. Rod Assy.

Crankpin journal—

Diameter 2" Length 1-1/16"

Lower bearing— Inter-changeable Steel-Backed

Material White Bearing Metal Alloy

Clearance0001 to0021

End play007 to012

Ship—solid, laminated or none None

Spun or separate Separate

Rods and pistons removed from above or below Above

CRANKSHAFT

Material Hardened Steel Forging

Weight—stripped 81.0#

Vibration dampener used—yes or no yes

Type Harmonic

Make of Car... PONTIAC SILVER STREAK Model ... 1949-27 Date ... 1949

CRANKSHAFT (cont'd)

Crankshaft counterweights used, number of ... 8
 Which main bearing takes thrust ... Rear Center
 Crankshaft end play003 - .008
 Main bearing—
 Type: Cast-in or ... Slip-in ... X
 If slip-in: Removable from below ... Yes
 Necessary to align ream ... Inter-changeable Steel
 Material ... Backed White Bearing Metal Alloy
 Clearance0003 - .0023
 Shim—solid, laminated or none ... None
 Main bearing journal diameter x length—
 No. 1 ... 2-3/8 x 1-1/4
 No. 2 ... 2-13/32 x 1-3/16
 No. 3 ... 2-7/16 x 1-7/16
 No. 4 ... 2-15/32 x 1-1/8
 No. 5 ... 2-1/2 x 1-27/32
 No. 6
 No. 7
 No. 8
 No. 9
 Crankshaft gear or sprocket—
 Make ... Own
 Material ... Hardened Steel

CAMSHAFT

Camshaft gear or sprocket—
 Make ... Own
 Material ... Alloy Iron
 Timing chain—
 Make ... Morse
 Number of links ... 56
 Width ... 3/4"
 Pitch ... 3/8"

VALVES

INTAKE VALVE—

Make ... Optional
 Material ... Optional
 Overall length ... 5-17/32"
 Actual overall diameter of head ... 1-15/32"
 Minimum port diameter ... 1-1/4"
 Angle of seat ... 30°
 Is valve seat an insert? ... No
 Stem diameter ... 5/16"
 Stem to guide clearance ... Free to .0006 Taper Guide
 Lift ... 19/64"
 Spring pressure and length—
 Outer—

VALVES (cont'd)

With valve closed—lb. ... 59 1/2 ins. 1-29/32
 With valve open—lb. ... 101 ins. 1-19/32
 Length out of engine—ins.
 Inner—
 With valve closed—lb. ... ins.
 With valve open—lb. ... ins.
 Length out of engine—ins.

EXHAUST VALVE—

Make ... Optional
 Material ... Optional
 Overall length ... 5-17/32"
 Actual overall diameter of head ... 1-11/32"
 Minimum port diameter ... 1-3/16"
 Angle of seat ... 45°
 Is valve seat an insert? ... No Material
 Stem diameter ... 5/16
 Stem to guide clearance ... Free to .0006 Taper Guide
 Lift ... 19/64

Spring pressure and length—

Outer—
 With valve closed—lb. ... 59 1/2 ins. 1-29/32
 With valve open—lb. ... 101 ins. 1-19/32
 Length out of engine—ins.
 Inner—
 With valve closed—lb. ... ins.
 With valve open—lb. ... ins.
 Length out of engine—ins.

Operating tappet clearance (hot or cold)—intake011" - .013" Hot
 Tappet clearance for valve timing—intake ... Same
 Operating tappet clearance (hot or cold)—exhaust011" - .013" Hot
 Tappet clearance for valve timing—exhaust ... Same
 Hydraulic valve lifters—yes or no ... No

Valve timing—

Intake opens ... 5 degrees BUDC piston travel ... inches
 Intake closes ... 39 " ALDC " " ... inches
 Exhaust opens ... 45 " BLDC " " ... inches
 Exhaust closes ... 5 " AUDC " " ... inches

Valve Timing Marks—on Flywheel, Vibration Damper, None
 Camshaft & Camshaft Sprockets

LUBRICATION

Lubricating system type—pressure or splash ... Full Pressure
 Oil pressure to— ... Metered Flow
 Main bearings—yes or no ... Yes
 Connecting rods—yes or no ... Yes
 Wristpins—yes or no ... Yes
 Camshaft bearings—yes or no ... Yes
 Tappets—yes or no ... No

1949 MODEL SPECIFICATIONS

PAGE 3

Make of Car. PONTIAC SILVER STREAK Model 1949-27 Date 1949

LUBRICATION (cont'd)

Timing gear or chain lubrication—*positive or splash* Positive
 Oil pump type Gear
 Oil grade recommended—*SAE viscosity and temperature range*—
 10W -10° +95°
 20W or 10 +10° +110°
 20W or 20 +32° +110°
 Normal oil pressure—*lbs. at M.P.H.* 35-40# @ 40 M.P.H.
 Pressure at which relief valve opens 38 Lbs.
 Capacity of oil reservoir—*quarts, dry* 6 Qts., refill 5 Qts.
 Oil pressure gauge make AC
 Oil reservoir level gauge type Blade
 Floating type oil intake—*yes or no* No
 External oil filter make No
 Other type of oil cleaner Internal Precipitation
 Oil cooler make None
 Chassis lubrication—*Make* Pressure Gun

FUEL

Gasoline tank—*capacity* 18 Gals.
 Fuel feed—
 Type—*vacuum tank, electric pump, gravity vacuum pump or camshaft pump* Camshaft Pump
 Make AC Model
 Carburetor—
 Make Carter Model WCD-719S
 Number used One
 Size 1-5/16
 Type—
 Up or down draft Down Single or dual Dual
 Intake manifold heat control—*manual, automatic or none* Thermo
 Automatic choke, make Carter Model
 Air cleaner—*intake silencer make* AC Aluminum
 Type—*dry felt; oil bath; oil coated fibre* Turnings
 Heavy Duty type—*Make* AC Model Oil Bath
 Muffler make Straight Through
 Tail pipe diameter 1-3/4"

COOLING

Water pump—
 Type Centrifugal
 Drive "V" Belt
 Is pump equipped with packing nut No
 Water circulation thermostat make Harrison
 Pressure relief valve—*yes or no* Yes
 By-pass for recirculation—*yes or no* Yes
 Radiator core—
 Type Cellular
 Make Harrison

COOLING (cont'd)

Cooling system—*capacity, quarts* 40 Pts. 10 Oz.
 Water jackets full length of cylinders—*yes or no* Yes
 Water all around cylinder—*yes or no* Yes
 Lower radiator hose—
 Inside diameter 1-3/4" Length 15-1/8"
 Upper radiator hose—
 Inside diameter 1-3/4" Length 8-15/16"
 Fan belt—
 Make Optional
 Angle of vee 28°
 Length, outside 40-11/16" Width, maximum 25/32"
 Fan—
 Make Own No. of Blades 4

IGNITION

Ignition units—
 Make Delco-Remy Model 1110816
 Manual or octane selector, *degrees advance* 10° retard 10°
 Maximum centrifugal advance crankshaft, *degrees* 28°
 at 4200 engine R.P.M.
 Inches of Mercury Necessary to operate Vacuum Advance (Plus or minus 1 inch) 8
 Maximum Vacuum advance crankshaft, *degrees* 17
 Breaker gap .015" Breaker arm tension 19-23 oz.
 Cam angle 31 deg.
 Timing—*Breaker points open* 2-6 degrees crankshaft rotation
 or 0 inches piston travel (after or before) top center
 with octane selector in the 0 position. Vibration
 Timing mark location—*flywheel, vibration dampener or none* Dampener
 Firing order 1-6-2-5-8-3-7-4
 Amperage draw of ignition coil—
 With engine stopped
 With engine idling 1.8
 Spark plug—
 Thread—*10 m.m., 14 m.m. or 18 m.m.* 14 m.m.
 Make AC Model 45
 Gap .023" - .028"
 Ignition cable make Packard

BATTERY

Make Delco Model 15 E 4 W
 Capacity—*ampere hours* 100 @ 20 hour rate
 Number of plates per cell 15
 Bench charging rate—
 Start 7 Finish 7
 Which battery terminal is grounded Negative
 Location of battery Under Hood
 Left Side

Make of Car. PONTIAC SILVER STREAK Model 1949-27 Date 1949

STARTING MOTOR

Make Delco Remy Model 1107957
 Normal engine cranking speed 44 RPM 0° 10 W Oil
 Brush spring tension 24-28
 Lock test—
 Amperage draw 600
 Volts 3
 Torque in pounds feet 15
 No load test—
 Amperage draw 65
 Volts 5 R.P.M. 5500
 Type of drive—Bendix or sliding gear with overrunning clutch
 Starting device—Solenoid, manual, etc. Solenoid
 Starter operation—check items required to start engine
 1. Turn on ignition X
 2. Depress starter pedal
 3. Depress accelerator pedal X
 4. Depress clutch pedal
 5. Operate button on dash X
 6. Pull out throttle
 Starting motor pinion meshes front or rear Rear
 No. of teeth in flywheel 140
 Face width of flywheel teeth 1/2"
 Gear ratio between starter armature and flywheel 15.55:1

GENERATOR

Make Delco Remy Model 1102711
 Type—third brush, shunt, etc. Shunt Wound
 Brush spring tension 24-28 oz.
 Current regulator, voltage regulator or current and voltage control unit Current and Voltage Reg.
 Maximum controlled charging rate
 Temperature Cold
 Amperes 36
 Voltage 7.2 - 7.4
 R.P.M. (Generator) 2040 *
 Cutout relay—
 Voltage at closing 6.2 - 6.7 Set to 6.4
 Amperes to open, reverse current
 Air gap .020
 Voltage regulator—
 Volts 7.2 - 7.4 Set to 7.4
 Temperature Hot
 Air gap .075
 Current regulator—
 Amperes Set to 36
 Temperature Hot
 Air gap .075
 Car speed for maximum charging rate 23 *
 Ammeter or charge indicator make AC

* With synchromesh transmission and 4.1 rear axle.

LAMPS

Lighting switch make Delco Remy
 Are tail and dash lights in series No
 Headlights—
 Make Guide
 Location—in fender, in catwalk, or radiator shell Fender
 Parking or fender light make Guide
 Tail and stop light make Guide
 Horn—
 Type—vibrator or motor Vibrator No. used 2
 Make Delco Remy
 Amperage draw of each 18-21

CLUTCH

Make Inland
 Drive type—
 Direct to flywheel face Yes
 Through fluid flywheel
 Semi-centrifugal
 Power operated unit—make
 Vibration insulation or neutralizer—fabric, rubber blocks or springs Springs
 No. of clutch driving discs None
 No. of clutch driven discs One
 Clutch facing—
 Material—woven or moulded asbestos, cork Woven
 Inside diameter 6
 Outside diameter 9 1/2
 Thickness 1/8
 No. required 2

TRANSMISSION

Transmission—
 Make Own Model Synco-Mesh
 No. of forward speeds 3
 Manual shift—yes, no yes
 Automatic or auxiliary shifting mechanism—yes X no Access
 If yes, Make Hydra-Matic
 Type—centrifugal, vacuum, electric or hydraulic Hydraulic
 Automatic overdrive—
 Make None
 Oil capacity—pints
 Oil grade recommended—S.A.E. viscosity
 Summer - Winter -
 Gear ratio in high—standard 5-passenger 4-door sedan 4.1
 Transmission ratio—
 In overdrive In second 1.66:1
 In third Direct In fourth
 In low 2.67:1 In reverse 3.02:1

Make of Car... PONTIAC SILVER STREAK Model 1949-27 Date 1949

TRANSMISSION (cont'd)

Constant mesh gears on second Yes
 Spur or helical gears—
 For second speed Helical
 For first speed "
 For reverse speed "
 For all speeds "
 Synchronous meshing and third gears
 Transmission oil—
 Capacity—pints 1-3/4
 Grade recommended—S.A.E. viscosity
 Summer EP. 80 or 90 Winter Year Around
 Universal joints—
 Make Mechanics - Saginaw
 Number used 2
 Type—metal with anti-friction
 bearing or metal with plain bearing
 Lubricated with For Life
 Drive taken through springs, torque arm, torque tube or
 radius rods Springs
 Torque taken through springs, torque arm, torque
 tube or radius rods Springs

REAR AXLE

Rear axle—
 Make Own Model
 Type—Semi, full or three-quarter floating Semi
 Minimum road clearance under center of rear
 axle—tires inflated 7-11/16"
 Rear axle oil—
 Capacity—pints 3-1/4
 Grade and type recommended—S.A.E. viscosity
 Summer 90 Hypoid Winter Year Around
 Type of gearing—spiral bevel, worm, hypoid Hypoid
 Gear ratio—standard 5-passenger 4-door sedan 4.2
 Optional gear ratios 3.9 - 4.3 EM 3.63
 Number of teeth—
 In ring gear 41 In pinion 10
 How is pinion adjusted—screw or shims Shims
 How is pinion bearing adjusted—screw or shims Screw
 Are pinion bearings carried in sleeve No
 Backlash between pinion and ring gear005 to .008

TIRES and WHEELS

Tires—
 Make Optional
 Size 7.10 x 15 No. of plies 4
 7.60 x 15 Access.

TIRES and WHEELS (Cont'd)

Inflation pressure—Front 24# Min. Rear 24# Min.
 Rim—Diameter 15" Width 5 1/2"

SPRINGS

FRONT SPRING—

Independent or conventional suspension Independent
 Type—coil, semi-elliptic, transverse, torsion Coil
 Make
 Material G.M. 29-M
 Torsional stabilizer at front Yes
 If leaf—
 Length Width
 Number of leaves—5-passenger, 4-door sedan
 Are radius rods used on axle
 If coil—
 Free length
 Length under curb weight

REAR SPRING—

Independent or conventional suspension Conventional
 Type—coil, semi-elliptic, transverse, torsion Semi-elliptic
 Make
 Material G.M. 9255
 Torsional stabilizer at rear No
 If leaf—
 Length 52-1/16" Width 2"
 Number of leaves—5-passenger, 4-door sedan 7
 Spring leaves lubricated with Chassis Lub.
 Spring cover, Yes Yes No
 Spring shackles—
 Front—Type Make
 Rear—Type Compression Make
 Spring bolts—
 Type Threaded
 If coil—
 Free length
 Length under curb weight
 Rate for above pounds per inch
 Shock absorbers—
 Make Delco
 Type, one way with lever, two way with lever, or direct acting
 Front 2 Way Direct Acting
 Rear 2 Way Direct Acting
 Fluid capacity (oz.)—front rear
 sealed units

Make of Car.....PONTIAC SILVER STREAK.....Model.....1949-27.....Date.....1949.....

STEERING

Steering gear—
 TypeWorm and Roller.....
 MakeSaginaw.....Model.....
 Ratio19:1.....
 Lubricant recommendedAll Season Steering Gear.....
 Steering wheel diameter18".....
 Drag link longitudinal or transverseTransverse.....
 Tie rod—one or two2.....
 Is intermediate steering arm usedYes.....
 Number of turns of steering wheel for full left
 to right swing of wheels
 Car turning radius—feet—right, left or bothR-19'9" L-19'10"
 Caster—degrees1/2° Neg. to 1° Neg.
 Camber—degrees or0° inches to
 Toe-in—inches0 to 1/16"
 Crosswise inclination of kingpin—degrees5°
 Front axle—
 MakeOwn.....Model.....1949.....
 Section type—I-beams, tubular or noneS. I. A. Reverse Elliott
 End type—Elliott or reverse ElliottSpindle & Yoke
 Minimum road clearance—tires inflated8-1/8

BRAKES

Foot brakes—
 MakeDuo-Servo.....
 Type of mechanism, hydraulic or mechanicalHydraulic
 If vacuum booster is standard, state make
 Brake lining moulded, semi-moulded or woven—
 Primary shoeMoulded.....
 Secondary shoeMoulded.....
 Drum—
 MaterialSteel & Cast Iron.....Diameter11"
 Lining—
 Length per wheel9-11/32 - 4 Primary
 11-31/32 - 4 Secondary

BRAKES (cont'd)

WidthF=2 1/4 R=1-3/4.....Thickness3/16"
 Clearance—~~max~~~~max~~
 Total foot braking area171 sq. in.
 Percent braking power on rear wheels40
 Hand lever operates on—transmission, separate rear brakes, rear service brakes or all four service brakesRear Service Brakes
 Hand brake, if separate from service brake—
 Internal or external
 Drum diameter
 Lining—
 Length per drum
 WidthThickness
 Clearance

FRAME and OTHER GENERAL DATA

Frame—
 Depth—maximum6-5/16"
 Thickness—maximum7/64"
 Flange width—maximum2-3/8"
 Wheelbase120"
 Tread—
 Front58"
 Rear59"
 Weight of standard 5-passenger, four-door sedan—
 ShippingChieftain 3360 Estimated
 Curb3510 Estimated
 Price of standard 5-passenger, 4-door sedanChieftain \$1860.*
 First serial number, this seriesP-OR 1001
 Serial number locationL.H. Front Door Pillar
 Overall length of car—
 With bumpers and bumper guards202 1/2"
 Overall width of car75-3/4"
 Overall height, road to roof with no load63-1/2"
 4 Dr. Sedan With Passengers

* A.D.P. Pontiac Less Sales Tax

Make of Car PONTIAC SILVER STREAK Model 1949-27 Date 1949

NOTE—In giving bearing dimensions, kindly use the following order: inside diameter, outside diameter and width. Where cup and cone bearings are used, give both cup and cone numbers.

BEARINGS

Water pump bearing—
 Make or type New Departure
 Size or number 954213

Fan bearing—
 Make or type
 Size or number

Starting motor commutator end bearing—
 Make or type Plain
 Size or number I.D. 9/16 Length 15/16

Starting motor drive end bearing—
 Make or type
 Size or number

Starting motor outboard bearing—
 Make or type Bronze Bushing
 Size or number 1/2 x 9/16 x 25/32

Generator commutator end bearing—
 Make or type Bronze Bushing
 Size or number 9/16 x 25/32 x 53/64

Generator drive end bearing—
 Make or type New Departure
 Size or number 903203

Transmission main drive gear front pilot bearing—
 Make or type New Departure
 Size or number 907109

Clutch throwout bearing—
 Make or type New Departure
 Size or number 2140122

Transmission main drive gear rear bearing—
 Make or type New Departure
 Size or number 954379

Transmission main shaft front pilot bearing—
 Make or type Rollers
 Size or number 14-7/32 x 17/32

Transmission main shaft rear bearing—
 Make or type New Departure
 Size or number 954387

Transmission countershaft front bearing—
 Make or type Rollers
 Size or number 25-1/8 x 13/16

Transmission countershaft rear bearing—
 Make or type Rollers
 Size or number 25-1/8 x 13/16

Transmission reverse idler bearing—
 Make or type Plain Bronze Bushing

BEARINGS (cont'd)

Size or number 55/64 x 63/64 x 3/4

Overdrive shaft rear bearing—
 Make or type
 Size or number

Overdrive shaft pilot bearing—
 Make or type
 Size or number

Main shaft extension bearing—
 Make or type Bronze Bushing
 Size or number 1-5/32 x 1-5/16 x 1-1/4

Rear axle pinion shaft front bearing—
 Make or type Timken - Taper Roller
 Size or number 506917 188963 - Hyatt

Rear axle pinion shaft rear bearing—
 Make or type Timken - Taper Roller
 Size or number 506920 188960 - Hyatt

Differential right bearing—
 Make or type Hyatt Taper Roller
 Size or number 179243

Differential left bearing—
 Make or type Same
 Size or number

Rear wheel inner bearing—
 Make or type New Departure
 Size or number 954172

Rear wheel outer bearing—
 Make or type
 Size or number

Front wheel inner bearing—
 Make or type New Departure
 Size or number 909052

Front wheel outer bearing—
 Make or type New Departure
 Size or number 909001

Kingpin upper bearing—
 Make or type Bronze Bushing
 Size or number 55/64 x 1-1/16 x 1-15/64

Kingpin lower bearing—
 Make or type Same
 Size or number

Kingpin thrust bearing—
 Make or type Ball
 Size or number 203679


Make of Car..... PONTIAC SILVER STREAK Model 1949-27 Date 1949

NOTE: (1) List only that equipment which is included in the factory delivered price. Special equipment which is fitted, but not included in the factory delivered price should be listed with its additional price.
 (2) Enter on top line your own model name, or series mark corresponding to Standard, DeLuxe or Custom.

EQUIPMENT	Models		
	Standard	DeLuxe	Custom
Catalog Designation of Model	Silver Streak	Do	
Lacquer make	Duco	Do	
Body finish, lacquer or synthetic enamel.....	Lacquer	Do	
Fender finish, lacquer or synthetic enamel.....	Lacquer	Do	
Hardware make	Ternstedt	Do	
Speedometer make	AC	Do	
Gasoline gauge make	AC	Do	
Thermometer make	AC	Do	
Car lock make	Rochester	Do	
Car lock operates on ignition or ignition and steering.....	Ignition	Do	
Clock make Jaeger mechanical or electrical.....	Electrical Access.	Yes	
Cigar lighter make Casco	Yes	Yes	
Safety glass make LOF Plate	Yes	Yes	
Safety glass type, laminated or tempered.....	Laminated	Do	
In windshield	Yes	Do	
In side windows	Yes	Do	
In rear window	Tempered	Do	
Bumper make	General	Spring &	Bumper Own
Bumper guard make	Own	Do	
Car heater make Own	Type Underseat	Access.	Do
Direction signal make Guide Lamp	Access.	Do	
Front—yes or no. Yes			
Rear—yes or no. Yes			
No. of tail lights included	2	Do	
No. of visors included	2	Do	
No. of horns included	2	Do	
No. of windshield wipers included	2	Do	
No. of spare tires included	1	Do	

Make of Car..... PONTIAC SILVER STREAK.....Model 1949-27.....Date 1949.....

BODY DIMENSIONS (Five-Passenger, Four-Door Sedan)

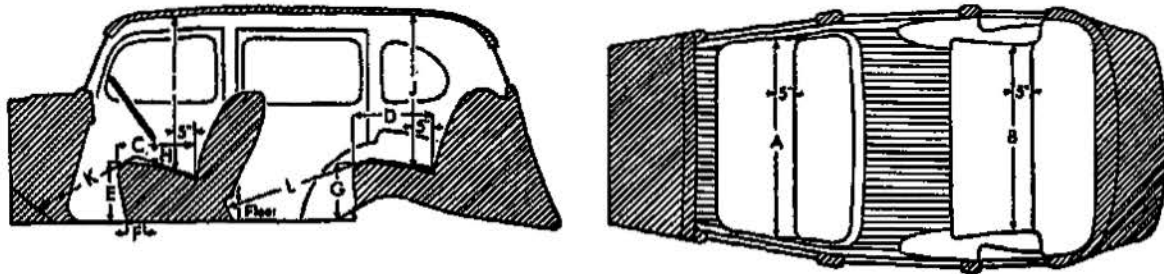

INTERIOR

All interior body dimensions taken with front seat in its rear position

Width of front seat cushion, measured 5 inches from back (A)	60"
Width of rear seat cushion, measured 5 inches from back (B)	58½"
Depth of front seat cushion (C)	18"
Depth of rear seat cushion (D)	18½"
Height of front seat cushion measured 12½ inches from center line of body (E)	13-¾"
Front seat horizontal adjustment, inches (F)	4½"
Front seat vertical adjustment, inches	½"
Height of rear cushion measured 12½ inches from center line of body (G)	12½"
Vertical distance steering wheel and seat cushion (H)	5-7/8"
Head room at front seat, measured 5 inches from back (I)	36"
Head room at rear seat, measured 5 inches from back (J)	37½"
Leg room in front seat, measured from 6 inches up on toe board, following contour of seat cushion (K)	42-¾"
Leg room in rear seat, measured from ^{heel} of foot rest , following contour of seat cushion (L)	40-¾"
Trunk capacity, cubic feet..... (Trunk will hold)	
Width of left front pillar on diagonal with door closed	2½"

Make of Car..... PONTIAC SILVER STREAK Model 1949-27 Date 1949

BODY DETAIL AND EQUIPMENT FORMS

DIRECTIONS

Only standard equipment included in the Factory Delivered price shown in column 3 should be listed on this sheet. Please arrange body types in an ascending price scale with the lowest priced type at the top and the highest priced type at the bottom.

IMPORTANT—To save your time, where an item is common to several types, use arrows to indicate the fact as shown in diagrams.

Standard abbreviations may be used where space limitations make this necessary. Where sub-headings such as those shown in column for Body Make are identified with numerals, these numerals may be used in filling in form.

Make	Body Model	Body Make
Crescent 8-80	Roadster	Fisher
	Phaeton	
	Two-door sedan	
	Four-door sedan	
	Coupe	
Crescent 8-80	Coupe with rumble	Murray
	Cabriolet	
	Roadster	
	Phaeton	
	Two-door sedan	
Crescent 8-80	Four-door sedan	Fisher
	Coupe	
	Coupe with rumble	
	Cabriolet	
	Limousine	
Crescent 8-80	Landaulet	Budd
		Fleetwood LeBaron

MAKE AND MODEL	BODY TYPE List Types on Ascending Price Scale Beginning with the Lowest Price	Factory Delivered Price Including Federal Tax and Handling Charge	Number of Pass- engers	Wheel- base	Shipping Weight	Seating Arrange- ment Number See Below	Body Make
SILVER STREAK	8 - STANDARD						
Chieftain	4 Dr. Sedan		6	120"		4	Fisher
Chieftain	2 Dr. Sedan		6	120"		3	"
Chieftain	Business Coupe		3	120"		1	"
Chieftain	Sedan Coupe		6	120"		3	"
Streamliner	4 Dr. Sedan		5	120"		4	"
Streamliner	Sedan Coupe		5	120"		3	"
	Station Wagon - Wood		8	120"		3 seats	"
	Station Wagon - Metal		8	120"		3 seats	"
	Sedan Delivery		2	120"		1	"
	8 - DELUXE						
Chieftain	4 Dr. Sedan		6	120"		4	"
Chieftain	2 Dr. Sedan		6	120"		3	"
Chieftain	Sedan Coupe		6	120"		3	"
Chieftain	Convertible Coupe		5	120"		3	"
Streamliner	4 Dr. Sedan		5	120"		4	"
Streamliner	Sedan Coupe		5	120"		3	"
	Station Wagon - Wood		6	120"		2 seats	"
	Station Wagon - Metal		6	120"		2 seats	"
	Sedan Delivery		2	120"		1	"

SEATING ARRANGEMENT NUMBERS

- 1—Two-door car with no rear seat.
- 2—Two-door car with rumble seat.
- 3—Two-door car with conventional rear cushion.
- 4—Four-door car with cushions front and rear.
- 5—Four-door car with cushions front and rear plus two auxiliary seats folding into front seat back.
- 6—Two-door car with two opera seats folding into sides of body.
- 7—Two-door car with two opera seats folding into rear of body.
- 8—Two-door car with one opera seat folding into rear of body and other seat stationary.
- 9—Two-door car with rear stationary seat for one passenger.