

Automobile Manufacturers Association

Consolidated Specification Questionnaire

For 1950 Models

Mechanical Details

Make of Car CADILLAC Model 60,61,62,75

Name of Maker Cadillac Motor Car Division Address 2860 Clark Avenue

Date January 1950

NOTE: (1) Subject to Correction: It is understood that the following data are subject to correction in the case of cars not in production at the time this compilation was requested.

(2) Only standard equipment included in Factory Delivered price should be included in this questionnaire.

ENGINE

No. of cylinders 8
 Valve arrangement V - Overhead
 Bore 3-13/16" Stroke 3-5/8"
 Cylinder head, cast iron or aluminum Cast iron
 Cylinder sleeve, Yes No X
 Piston displacement 331
 Taxable horsepower 46.5
 Horsepower rating—

To be based on actual performance corrected to 60°F. at sea level (barometric pressure 29.92 inches of mercury) with standard fuel. (Octane No. of fuel 88) Research

—With Bare Engine—

Maximum brake hp. 160 at 3800 R.P.M.

—With Standard Accessories—*

Maximum brake hp. 141 at 3400 R.P.M.

*Those standard accessories needed for normal operation including fan, generator, starter, air cleaner, muffler, manifolds, fuel and water pumps.

Maximum torque—

With bare engine, lb. ft. 312 at 1800 R.P.M.

With standard accessories,* lb. ft. 297 at 1800 R.P.M.

Compression Ratio—

Standard 7.5-1 Optional **

Standard compression pressure —pounds—

At cranking speed 120-140

At what R.P.M. 194 at 1000 RPM

PISTONS and RINGS

Piston
 Make ALCOA - Bohn
 Material Aluminum Alloy
 Features—split skirt, invar strut, oval, tin-plated, aluminum oxide finish, auto-thermic, V-Bridge, porous chrome plate, etc. TT slot - Stanate finish
 Weight—ounces—without rings, pin or bushing 19.296
 Length 3-15/16"
 Clearance—
 Top land .0305 to .0355
 Skirt, top .0015 bottom .0

PISTONS and RINGS (cont'd)

Piston ring groove depth—
 Oil .187 Compression .187
 No. of oil rings used per piston 1
 Width of oil rings 3/16"
 *Width of oil ring gap .010-.020"
 No. of compression rings used per piston Two
 Width of compression rings 5/64"
 *Width of compression ring gap .010-.020"
 Maximum wall thickness of oil rings .165"
 Maximum wall thickness of compression rings .184"
 Are ring expanders used, Yes No X
 * at 3.8125 min. bore dia.

RODS and PINS

Wristpin—
 Material 1045 steel
 Length 3-3/32" Diameter 1"
 Locked in rod, piston or floating Pressed in rod
 Clearance in piston 0 to .05
 Clearance in rod 0 to 0
 Connecting rod—
 Length—center to center 6-5/8"
 Material 1041 steel
 Weight—ounces 24.53
 Crankpin journal—
 Diameter 2-1/4" Length 2" (2 rods per pin)
 Lower bearing—
 Material Moraine Durex
 Clearance .001" to .0035"
 End play .008" to .014" (Total 2 rods)
 Shim Ship—solid, laminated or none None
 Spun or separate Separate
 Rods and pistons removed from above or below Above

CRANKSHAFT

Material 1145 steel
 Weight—stripped 61.5
 Vibration dampener used—yes or no Yes
 Type Rubber absorption

** Export 6.70-1

Make of Car CADILLAC Model 60, 61, 62, 75 Date January 1950

CRANKSHAFT (cont'd)

Crankshaft counterweights used, number of 6
 Which main bearing takes thrust Rear
 Crankshaft end play001-.005
 Main bearing—
 Type: Cast-in or Slip-in X
 If slip-in: Removable from below Yes
 Necessary to align ream No
 Material Moraine Durex
 Clearance0015 - .0025
 Shim—solid, laminated or none None
 Main bearing journal diameter x length—
 No. 1 2-1/2 x 1
 No. 2 2-1/2 x 1-1/16
 No. 3 2-1/2 x 1-1/16
 No. 4 2-1/2 x 1-1/16
 No. 5 2-1/2 x 1-7/8
 No. 6
 No. 7
 No. 8
 No. 9

Crankshaft gear or sprocket— Sprocket
 Make Own
 Material 1115 steel

CAMSHAFT

Camshaft gear or sprocket— Sprocket
 Make Own
 Material 1115 steel
 Timing chain—
 Make Link Belt
 Number of links 46
 Width 11/16
 Pitch500

VALVES

INTAKE VALVE—

Make Rich Mfg. & Eaton
 Material 3140 steel
 Overall length ~~#####~~ (R) 4.612(E)4.627
 Actual overall diameter of head 1.750
 Minimum port diameter 1-5/8
 Angle of seat 44°
 Is valve seat an insert? No
 Stem diameter 11/32
 Stem to guide clearance0005 to .0025
 Lift327
 Spring pressure and length—
 Outer—

VALVES (cont'd)

With valve closed—lb. 60 ins. 1.696
 With valve open—lb. 135 ins. 1.366
 Length out of engine—ins. 1.968
 Inner—
 With valve closed—lb. - ins. -
 With valve open—lb. - ins. -
 Length out of engine—ins. -

EXHAUST VALVE—

Make Rich Mfg. & Eaton
 Material Head-N82120 Stem-8729
 Overall length ~~#####~~ (R)4.612(E)4.627
 Actual overall diameter of head 1.437
 Minimum port diameter 1-5/16
 Angle of seat 44°
 Is valve seat an insert? No Material -
 Stem diameter 11/32"
 Stem to guide clearance0015 to .0035
 Lift327

Spring pressure and length—
 Outer—
 With valve closed—lb. 60 ins. 1.696
 With valve open—lb. 135 ins. 1.366
 Length out of engine—ins. 1.968
 Inner—
 With valve closed—lb. - ins. -
 With valve open—lb. - ins. -
 Length out of engine—ins. -

Operating tappet clearance (hot or cold)—intake Automatic
 Tappet clearance for valve timing—intake001
 Operating tappet clearance (hot or cold)—exhaust Automatic
 Tappet clearance for valve timing—exhaust001
 Hydraulic valve lifters—yes or no Yes

Valve timing—
 Intake opens 24 degrees BUDC piston travel inches
 Intake closes 98 " ALDC " " inches
 Exhaust opens 63 " BLDC " " inches
 Exhaust closes 49 " AUDC " " inches
 Valve Timing Marks—on Flywheel, Vibration Damper, None

LUBRICATION

Lubricating system type—pressure or splash Pressure
 Oil pressure to—
 Main bearings—yes or no Yes
 Connecting rods—yes or no Yes
 Wristpins—yes or no No
 Camshaft bearings—yes or no Yes
 Tappets—yes or no Yes

Make of Car CADILLAC Model 60,61,62,75 Date January 1950

LUBRICATION (cont'd)

Timing gear or chain lubrication—*positive or splash* Splash
 Oil pump type Gear
 Oil grade recommended—*SAE viscosity and temperature range* *
 / 32°F. — 20W or SAE-20 *Minimum
 / 10°F. — 20W anticipated
 ~ 10°F — 10W temperature
 Below -10°F. 5W
 Normal oil pressure—*lbs. at M.P.H.* 35 at 30 MPH
 Pressure at which relief valve opens 40 lbs.
 Capacity of oil reservoir—*quarts, dry* 5 *refill* —
 Oil pressure gauge make AC
 Oil reservoir level gauge type Dip stick
 Floating type oil intake—*yes or no* Yes
 External oil filter make None
 Other type of oil cleaner None
 Oil cooler make None
 Chassis lubrication—*Make* Lincoln

FUEL

Gasoline tank—*capacity* 20 gallon
 Fuel feed—
 Type—*vacuum tank, electric pump, gravity vacuum pump or camshaft pump* Camshaft pump
 Make Model
 Carburetor—1456949
 Make Carter Model WCD 742-S
 Number used One
 Size 1-1/4"
 Type—
 Up or down draft Down Single or dual Dual
 Intake manifold heat control—*manual, automatic or none* Automatic
 Automatic choke, make Carter Model
 Air cleaner—intake silencer make AC
 Type—*dry felt; oil bath; oil coated fibre* Oil bath
 Heavy Duty type—*Make* None Model
 Muffler make Walker
 Tail pipe diameter 2"

COOLING

Water pump—
 Type Centrifugal - Dual outlet
 Drive Belt
 Is pump equipped with packing nut No
 Water circulation thermostat make Fulton sylphon
 * Pressure relief valve—*yes or no* No
 By-pass for recirculation—*yes or no* Yes
 Radiator core—
 Type Tube and fin
 Make Harrison Radiator Division

*Pressure cap

COOLING (cont'd)

Cooling system—*capacity, quarts* 18
 Water jackets full length of cylinders—*yes or no* Yes
 Water all around cylinder—*yes or no* Yes
 Lower radiator hose—
 Inside diameter 1-3/4 Length 8-7/16
 Upper radiator hose—moulded
 Inside diameter 1-3/4 Length 8-7/16
 Fan belt—
 Make Gates & Goodyear - Wedge type
 Angle of vee 40° inc.
 Length, outside 57" Width, maximum 380
 Fan—
 Make Hayes No. of Blades 4
60,61,62
75-86
5

IGNITION

Ignition units—
 Make Delco Model
 Manual or octane selector, *degrees advance* — *retard* —
 Maximum centrifugal advance crankshaft, *degrees* 28-32
 at 3600 engine R.P.M.
 Inches of Mercury Necessary to operate Vacuum Advance (Plus or minus 1 inch) 5" start - 14" full adv.
 Maximum Vacuum advance crankshaft, *degrees* 18-22°
 * Breaker gap .013-.018 Breaker arm tension 19-23 oz.
 Cam angle 31° plus or minus 1-1/2° deg.
 Timing—*Breaker points open* 5° BTC *degrees crankshaft rotation*
 or inches piston travel (after or before) top center
 with octane selector in the position.
 Timing mark location—*flywheel, vibration dampener or none*
 Firing order 1-8-4-3-6-5-7-2
 Amperage draw of ignition coil—
 With engine stopped 4.5 - 5.5
 With engine idling 2 - 3
 Spark plug—
 Thread—*10 m.m., 14 m.m. or 18 m.m.* 14 MM
 Make AC Model 46-5
 Gap .035"
 Ignition cable make Packard Electric

BATTERY

Make Delco Model K1W
 Capacity—*ampere hours* 115 @ 20 hour rate
 Number of plates per cell 17
 Bench charging rate—
 Start 10 Finish 8
 Which battery terminal is grounded Negative
 Location of battery On tray attached to R.H. dash
to frame brace front of dash

*New points - .010-.015 for used points

Make of Car CADILLAC Model 50, 61, 62, 75 Date January 1950

STARTING MOTOR

Make Delco Model 1107969
 Normal engine cranking speed —
 Brush spring tension 24-28 oz.
 Lock test—
 Amperage draw 600 Max.
 Volts 310 Max.
 Torque in pounds feet 16
 No load test—
 Amperage draw 65 amps
 Volts 5.67 R.P.M. 5500
 Type of drive—Bendix or sliding gear with overrunning clutch
 Starting device—Solenoid, manual, etc. Solenoid
 Starter operation—check items required to start engine
 1. Turn on ignition X
 2. Depress starter pedal —
 3. Depress accelerator pedal Recommended
 4. Depress clutch pedal "
 5. Operate button on dash X
 6. Pull out throttle —
 Starting motor pinion meshes front or rear Front
 No. of teeth in flywheel 145
 Face width of flywheel teeth .500
 Gear ratio between starter armature and flywheel 16.1-1

GENERATOR

Make Delco Model 1102700
 Type—third brush, shunt, etc. Shunt
 Brush spring tension 24-28 oz.
 Current regulator, voltage regulator or current and voltage control unit Current & voltage
 Maximum controlled charging rate
 Temperature 150°F.
 Amperes 40-46
 Voltage 8.0
 R.P.M. 2400
 Cutout relay—
 Voltage at closing 5.9-6.8 (Adj. to 6.4)
 Amperes to open, reverse current —
 Air gap .020
 Voltage regulator—
 Volts 7.0-7.7 (Adj. to 7.4)
 Temperature 150°F.
 Air gap .075
 Current regulator—
 Amperes 40-46 (Adj. to 42)
 Temperature 150°F.
 Air gap .075
 Car speed for maximum charging rate 28 MPH
 Ammeter or charge indicator make AC

LAMPS

Lighting switch make Delco
 Are tail and dash lights in series No
 Headlights—
 Make Guide
 Location—in fender, in catwalk, or radiator shell fenders
 Parking or fender light make Guide
 Tail and stop light make Guide
 Horn—
 Type—vibrator or motor Vibrator No. used Two
 Make Delco
 Amperage draw of each Low note 21, high 19

CLUTCH

Make Long Mfg. Co.
 Drive type—
 Direct to flywheel face Yes
 Through fluid flywheel —
 Semi-centrifugal Yes
 Power operated unit—make None
 Vibration insulation or neutralizer—fabric,
rubber blocks or springs Springs
 No. of clutch driving discs Flywheel & one press. plate
 No. of clutch driven discs One
 Clutch facing—
 Material—woven or moulded asbestos, cork Woven
 Inside diameter 7"
 Outside diameter 61 (10½") 75 (11")
 Thickness .137
 No. required Two

TRANSMISSION

Transmission—Std. conventional three speed
 Make Own Model —
 No. of forward speeds three
 Manual shift—yes, no Yes
 Automatic ~~or similar~~ shifting mechanism—yes, no no
 * If yes, Make Hydra-Matic transmission
 Type—centrifugal, vacuum, electric or hydraulic
 Automatic overdrive—
 Make None
 Oil capacity—pints —
 Oil grade recommended—S.A.E. viscosity
 Summer — Winter —
 Gear ratio in high—standard 5-passenger
4-door sedan Direct drive
 Transmission ratio—Std. transmission
 In overdrive — In second 1.53-1
 In third Direct drive In fourth —
 In low 2.39-1 In reverse 2.39-1

*Hydra-Matic - standard on series 62, 60
 Ratios - Low - 3.819 Fourth - direct
 Second - 2.634 Reverse - 4.304
 Third - 1.450

Make of Car... Cadillac Model 60-61-62-75 Date 12/49

STEERING

Steering gear—
 Type Recirculating Ball
 Make Saginaw Model
 Ratio 21.3 (overall 25.47)
 Lubricant recommended 5-200 Strg. Gear Lub.
 Steering wheel diameter 18"
 Drag link longitudinal or transverse Transverse
 Tie rod—one or two Two
 Is intermediate steering arm used No
 Number of turns of steering wheel for full left
 to right swing of wheels 4.50
 Car turning radius—feet—right, left or both +
 Caster—degrees -1/2° to +1/2°
 Camber—degrees or -3/8° inches to +3/8°
 Toe-in—inches 1/32" to 3/32"
 Crosswise inclination of kingpin—degrees 5°51' @ 0°Camber
 Front axle— Independent Suspension
 Make Own Model
 Section type—I-beams, tubular or none
 End type—Elliott or reverse Elliott
 Minimum road clearance—tires inflated

BRAKES

Foot brakes—
 Make Bendix
 Type of mechanism, hydraulic or mechanical Hydraulic
 If vacuum booster is standard, state make None
 Brake lining moulded, semi-moulded or woven—
 Primary shoe Moulded
 Secondary shoe Moulded
 Drum—
 Material Composite Diameter 60-61-62 75
 Lining—
 Length per wheel Riveted 22.45 25.84

+ Outside Bumper Sweep
 61 62 60 75
 22.00' 22.50' 23.00' 25.50'

BRAKES (cont'd)

Width 2-1/2" Thickness 3/16"
 Clearance—tor .007 .010 .007 .010
 Total foot braking area 60-61-62 (224.5) 75(258.5)
 Percent braking power on rear wheels 44.2%
 Hand lever operates on—transmission, separate rear brakes, rear service brakes or all four service brakes Rear Service
 Hand brake, if separate from service brake—
 Internal or external
 Drum diameter
 Lining—
 Length per drum
 Width Thickness
 Clearance

FRAME and OTHER GENERAL DATA

	(61)	(62)	(60,75)
Frame—			
Depth—maximum	7-1/8	7-5/32	7-3/16
Thickness—maximum	1/8	9/64	5/32
Flange width—maximum	2-9/16	2-37/64	2-19/32
Wheelbase	61(122)	62(126)	60(130) 75(146 3/4)
Tread—			
Front	59		
Rear	63		
Weight of standard 5-passenger, four-door sedan—			
Shipping			
Curb			
Price of standard 5-passenger, 4-door sedan			
First serial number, this series	61(506100000)	62(506200000)	75(507500000)
* Serial number location	60(506000000)	75(507500000)	

** Overall length of car—
 With bumpers and bumper guards
 Overall width of car normal
 Overall height, road to roof, with no load

* Upper right corner on front face of R.H. Block. Numbered right angle to crankshaft. The chassis number stamped two places, top flange of R.H. Side Bar—rear of engine mounting, and top R.H. Side Bar, midway in chassis covered by body. Number same as engine number.

	61 69	6219	6237 & D	6267	6019	7523-33
** Overall length	211 7/8	215 7/8	220 7/8	220 7/8	224 7/8	236 5/8
Overall width	80 1/8	80 1/8	80 1/8	80 1/8	80 1/8	80 1/8
Overall height	62	62 11/16	60 15/16	61 1/8	62 11/16	64 1/16
Overall height (6137)---	60 15/16					

Make of Car... Cadillac Model ... 60-61-62-75 Date ... 12/49

NOTE—In giving bearing dimensions, kindly use the following order: inside diameter, outside diameter and width. Where cup and cone bearings are used, give both cup and cone numbers.

BEARINGS

Water pump bearing—
 Make or type
 Size or number One Bearing

Fan bearing—
 Make or type N.D. Ball
 Size or number 954553

Starting motor commutator end bearing—
 Make or type Durex Bushing
 Size or number 3/4" x 5/8" x 9/16"

Starting motor drive end bearing—
 Make or type
 Size or number

Starting motor outboard bearing—
 Make or type Durex Bushing
 Size or number 9/16" x 5/8" x 3/4"

Generator commutator end bearing—
 Make or type Bronze Bushing
 Size or number 9/16" x 3/4" x 3/4"

Generator drive end bearing—
 Make or type N. D. Ball
 Size or number 954378

Transmission main drive gear front pilot bearing—
 Make or type Durex Bushing
 Size or number 412562

Clutch throwout bearing—
 Make or type Bearing Co. of America
 Size or number 1421681

Transmission main drive gear rear bearing—
 Make or type N.D. Ball
 Size or number 954381 61-86-75

Transmission main shaft front pilot bearing—
 Make or type Roller 61-75-86
 Size or number 1294780

Transmission main shaft rear bearing—
 Make or type N.D. Ball
 Size or number 954383 61-75-86

Transmission countershaft front bearing—
 Make or type Roller
 Size or number 1928445 61-75-86

Transmission countershaft rear bearing—
 Make or type Roller
 Size or number 1298445 61-75-86

Transmission reverse idler bearing—
 Make or type Plain Babbitt Bushing

BEARINGS (cont'd)

Size or number 1433125

Overdrive shaft rear bearing—
 Make or type
 Size or number

Overdrive shaft pilot bearing—
 Make or type
 Size or number

Main shaft extension bearing—
 Make or type Plain Babbitt Bushing
 Size or number 1442073 61-75-86

Rear axle pinion shaft front bearing—
 Make or type Tapered Roller
 Size or number 1422450

Rear axle pinion shaft rear bearing—
 Make or type Tapered Roller
 Size or number (60-61-62) 1422451(75-86)1440011

Differential right bearing—
 Make or type Tapered Roller
 Size or number 1440844

Differential left bearing—
 Make or type Tapered Roller
 Size or number (60-61-62)1419355(75-86)1440010

Rear wheel axle bearing—
 Make or type N.D. Ball
 Size or number (60-61-62-75)954172(86)954148

Rear wheel outer bearing—
 Make or type
 Size or number

Front wheel inner bearing—
 Make or type N.D. Ball
 Size or number 909062

Front wheel outer bearing—
 Make or type N.D. Ball
 Size or number 909025

Kingpin upper bearing—
 Make or type Steel Backed Bronze Bushing
 Size or number 1438194

Kingpin lower bearing—
 Make or type Steel Backed Bronze Bushing
 Size or number 1438194

Kingpin thrust bearing—
 Make or type Hoover Ball Bearing Co.
 Size or number 1438440

19 50 MODEL SPECIFICATIONS

Make of Car Cadillac Model 60-61-62-75 Date 12/49


- NOTE: (1) List only that equipment which is included in the factory delivered price. Special equipment which is fitted, but not included in the factory delivered price should be listed with its additional price.
 (2) Enter on top line your own model name, or series mark corresponding to Standard, DeLuxe or Custom.

EQUIPMENT	Models		
	Standard	DeLuxe	Custom
Catalog Designation of Model	61-62-60-75		
Lacquer make <u>R. & R. - Dupont</u>	61-62-60-75		
Body finish, <i>lacquer or synthetic enamel</i> <u>Lacquer</u>	61-62-60-75		
Fender finish, <i>lacquer or synthetic enamel</i> <u>Lacquer</u>	61-62-60-75		
Hardware make <u>Ternstedt</u>	61-62-60-75		
Speedometer make <u>A.C.</u>	61-62-60-75		
Gasoline gauge make <u>A.C.</u>	61-62-60-75		
Thermometer make <u>A.C.</u>	61-62-60-75		
Car lock make <u>Briggs & Stratton</u>	61-62-60-75		
Car lock operates <i>on ignition or ignition and steering</i>	61-62-60-75		
Clock make <u>Westclox</u> <i>mechanical or electrical</i> <u>Elec.</u>	61-62-60-75		
Cigar lighter make <u>Casco</u>	61-62-60-75		
Safety glass make <u>Libbey Owens Ford</u>	61-62-60-75		
Safety glass type, <i>laminated or tempered</i>	61-62-60-75		
In windshield <u>Laminated</u>	61-62-60-75		
In side windows <u>Laminated</u>	61-62-60-75		
In rear window <u>Safety Plate</u>	61-62-60-75		
Bumper make <u>Own</u>	61-62-60-75		
Bumper guard make <u>Own</u>	61-62-60-75		
Car heater make <u>*</u> Type			
Direction signal make <u>Delco</u>	61-62-60-75		
Front—yes or no <u>Yes</u> Rear—yes or no <u>Yes</u>	61-62-60-75		
No. of tail lights included <u>Two</u>	61-62-60-75		
No. of visors included <u>Two</u>	61-62-60-75		
No. of horns included <u>Two</u>	61-62-60-75		
No. of windshield wipers included <u>Two</u>	61-62-60-75		
No. of spare tires included <u>One</u>	61-62-60-75		
No. of Backup Lights <u>Two</u>	61-62-60-75		

* Not included factory delivered price
 Heaters - Harrison Radiator Division

Make of Car... Cadillac Model ... 60-61-62-75 Date ... 12/49

BODY DIMENSIONS (Five-Passenger, Four-Door Sedan)

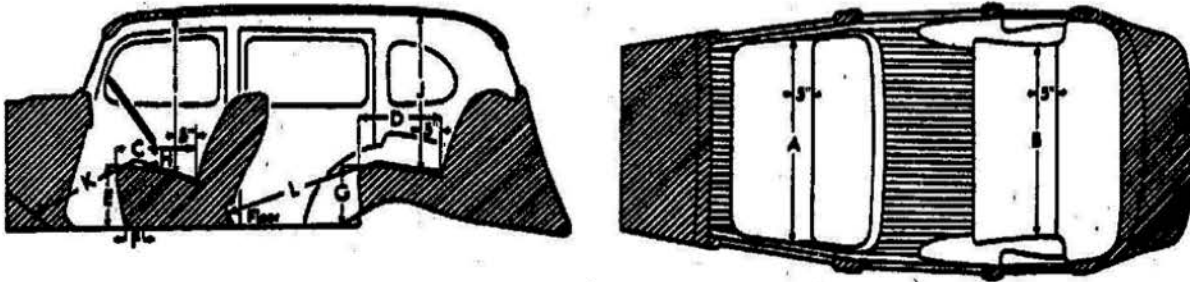

INTERIOR

All interior body dimensions taken with front seat in its rear position

	61	62	60	75
Width of front seat cushion, measured 5 inches from back (A)	63 1/2	63 1/2	63 1/2	64
Width of rear seat cushion, measured 5 inches from back (B)	64 1/2	64 1/2	64 1/2	56 7/8
Depth of front seat cushion (C)	18 9/16	18 5/8	18 5/8	18 9/16
Depth of rear seat cushion (D)	19	19	19	19 3/4
Height of front seat cushion measured 14 15 inches from center line of body (E)	14 3/16	14 3/16	14 3/16	13 11/16
Front seat horizontal adjustment, inches (F)	4	4	4	4
Front seat vertical adjustment, inches	1/4" Rise →			
Height of rear cushion measured 12 12 inches from center line of body (G)	12 1/8	12 1/8	12 1/8	13 15/16
Vertical distance steering wheel and seat cushion (H)	5 3/8	5 3/8	5 3/8	6
Head room at front seat, measured 5 inches from back (I) 8° from vertical	35 1/8	35 1/2	35 1/2	37
Head room at rear seat, measured 5 inches from back (J) 8° from vertical	35 1/4	36 1/4	36 1/4	35
Leg room in front seat, measured from 6 inches up on toe board, following contour of seat cushion (K)	43 7/16	44	44	43 5/16
Leg room in rear seat, measured from center of foot rest, following contour of seat cushion (L)	40 5/8			
Trunk capacity, cubic feet				
Width of left front pillar on diagonal with door closed	3 1/16			

Make of Car... Cadillac Model... 60-61-62-75 Date... 12/49

BODY DETAIL AND EQUIPMENT FORMS.

DIRECTIONS

Only standard equipment included in the Factory Delivered price shown in column 3 should be listed on this sheet. Please arrange body types in an ascending price scale with the lowest priced type at the top and the highest priced type at the bottom.

IMPORTANT—To save your time, where an item is common to several types, use arrows to indicate the fact as shown in diagrams.

Standard abbreviations may be used where space limitations make this necessary. Where sub-headings such as those shown in column for Body Make are identified with numerals, these numerals may be used in filling in form.

Make	Body Model	Body Make
Crescent 8-66	Roadster	Fisher
	Phaeton	
	Two-door sedan	
	Four-door sedan	
	Coupe	Murray
	Coupe with rumble	
	Gabriellet	
Crescent 8-68	Roadster	Fisher
	Phaeton	
	Two-door sedan	
	Four-door sedan	
	Coupe	Hudd
	Coupe with rumble	
	Gabriellet	
	Limousine	Fleetwood
Landulet	Loren	

MAKE AND MODEL	BODY TYPE List Types on Ascending Price Scale Beginning with the Lowest Price	Factory Delivered Price including Federal Tax and Handling Charge	Number of Passengers	Wheel-base	Shipping Weight	Seating Arrangement Number See Below	Body Make
Cadillac 6137	Coupe		5	122		3	Fisher
6169	Sedan		5	122		4	
6237	Coupe		5	126		3	
6237D	↓		5	126		3	
6267	Conv.		5	126		3	
6219	Sedan		5	126		4	
6019	↓		5	130		4	Fleetwood
7523	↓		7	146 3/4		5	
7533	↓		7	146 3/4		5	

SEATING ARRANGEMENT NUMBERS

- 1—Two-door car with no rear seat.
- 2—Two-door car with rumble seat.
- 3—Two-door car with conventional rear cushion.
- 4—Four-door car with cushions front and rear.
- 5—Four-door car with cushions front and rear plus two auxiliary seats folding into front seat back.
- 6—Two-door car with two opera seats folding into sides of body.
- 7—Two-door car with two opera seats folding into rear of body.
- 8—Two-door car with one opera seat folding into rear of body and other seat stationary.
- 9—Two-door car with rear stationary seat for one passenger.