

AMA Specifications – Passenger Car

Data prepared and distributed by American automobile manufacturers, using uniform questionnaire form developed by car manufacturers under auspices of the Automobile Manufacturers Association.

MAKE OF CAR	DODGE	MODEL YEAR	1958	DATE: ISSUED	Sept. 1957	REVISED	Jan. 1958
COMPANY	DODGE DIVISION, CHRYSLER CORPORATION, DETROIT 31, MICHIGAN						
MODEL NAME	SYMBOL	(6-Cyl only)		MODEL NAME	SYMBOL		
Coronet Standard	LD2-L1	LD1-L1		Custom Royal	LD3-H		
Coronet Custom	LD2-L2	LD1-L2		+Custom Sierra+	LD3-H		
Royal	LD2-M	---		#D500	#LD2, LD3		
+Suburban, Sierra+	LD3-L	---		(+Station Wagons)			

#Engine Package Only.

TABLE OF CONTENTS

General Specifications	1	Brakes	15	Station Wagon	24
Engine – Mechanical	2	Front Suspension & Steering	16	Body & Car – General	25
Electrical	8	Rear Suspension	18	Weights	26
Drive Units	12	Body Dimensions	19	Index	27

NOTES:

- The specifications set forth herein are those in effect at the date of compilation and are subject to change without notice.
- UNLESS OTHERWISE INDICATED:
- All specifications are standard for the models under which they are listed.
- Specifications apply basically to 4-door sedan or equivalent. Body dimensions shown on pages 19-24 include other body models available.
- All dimensions are nominal engineering dimensions.

GENERAL SPECIFICATIONS

MODEL	Additional Information Page No.:	LD1	LD2-L	LD2-M	LD3-H Except Suburban	LD3-L LD3-H Suburban	LD2 & LD3 D500 Package (a) (b) (c)
Wheelbase (L-101)	22	122.0					
Tread	Front (W-101)	61.4(f)			60.9		Not applicable
	Rear (W-102)	60.1	60.2(f)		59.8		" "
Maximum Overall Dimensions	Length (L-103)	213.8				216.2	" "
	Width (W-103)	78.3					" "
	Height (H-101)	56.6		56.8	57.1	" "	
Transmission— (Specify trade name - opt., not available)	Manual	Standard					None
	Overdrive	None					
	Automatic	*PF Optional	*PF or TF Opt	*TF Optional	*TF Standard		
Axle ratio	Manual	3.91	3.54	3.31	3.54	Not applicable	
	Overdrive	None					
	Automatic	3.73	(d)	3.15		Not applicable	
Tire size		7.50 x 14 (e)		8.00 x 14		" "	
	Type, no. cyl., valve arr.	In-Line 6, L-Hd.		90° V8, OHV In Line		90° V-8, OHV In Line	
Engine	Fuel system (Carb. or Inj.)	Carbureted					(a) (b) (c)
	Bore and stroke	3.25 x 4.63	3.69 x 3.80	4.06 x 3.38	4.12 x 3.38		
	Piston displ., cu. in.	230	325	350	361		
	Std. compression ratio	8.0	9.0	10.0			
	Max. bhp at engine rpm	138 @ 4000	252 @ 4400	265 @ 4400	295 @ 4600	(a) (b) (c)	
	Max. torque at rpm	208 @ 1600	345 @ 2400	355 @ 2800	385 @ 2800	(a) (b) (c)	

* PF-PowerFlite, TF-TorqueFlite

Rev. Form 6-57

- (a) Single carburetor, available on all V-8 models; bhp 305 at 4600 rpm, torque 400 at 2800 rpm
- (b) Two carburetors, available on all V-8 models; bhp 320 at 4800 rpm, torque 400 at 2800 rpm.
- (c) Fuel injector, available on all V-8 models except Suburbans; bhp 333 at 4800 rpm, torque 400 at 3600 rpm.
- (d) 3.31 with PowerFlite; 3.15 with TorqueFlite. (e) Except 8.00 x 14 on LD2-L1 Convertible.
- (f) On LD2-L1 Convertible: Front 60.9, Rear 59.8.

AMA Specifications – Passenger Car

MAKE OF CAR	DODGE	MODEL YEAR	1958	DATE ISSUED	Sept. 1957	REVISED	Jan. 1958
MODEL	LD1	LD2-L (*1-2B)	LD2-M (*1-4B)	LD3		LD2 & LD3 D500 Package	

ENGINE—GENERAL

Type, no. cyls., valve arr.		In-Line 6, L-head	90° V-8 OHV Latrl	90° V-8, OHV In line		
Bore and stroke		3.25 x 4.63	3.69 x 3.80	4.06 x 3.38	4.12 x 3.38	
Piston displacement, cu. in.		230	325	350	361	
Bore spacing (C/L to C/L)		(a)	4.19	4.80		
No. system (front to rear)	L. Bank	Not applicable		1 - 3 - 5 - 7		
	R. Bank	Not applicable		2 - 4 - 6 - 8		
Firing order		1-5-3-6-2-4		1-8-4-3-6-5-7-2		
Compres. ratio (nominal)	Standard	8.0	9.0 ϕ	10.0		
	Optional	None				
Cylinder Head Material	Standard	Cast iron				
	Optional	None				
Cylinder Sleeve - Wet, dry, none		None				
Number of mounting points	Front	Two				
	Rear	One				
Taxable Dia.² x No. Cyl. horsepower 2.5		25.4	43.3	52.7	54.3	
Published max. bhp at engine RPM*	Standard ϕ	138 @ 4000	252 @ 4400	265 @ 4400	295 @ 4600	*1-4B 305 @ 4600
	Optional ϕ	None				*2-4B 320 @ 4800 *F.I. 333 @ 4800
Published max. torque* (lb. ft. @ RPM)	Standard ϕ	208 @ 1600	345 @ 2400	355 @ 2800	385 @ 2800	*1-4B 400 @ 2800
	Optional ϕ					*2-4B 400 @ 2800 *F.I. 400 @ 3600
Recommended fuel regular - premium	Standard	Regular		Premium		
	Optional	---				
Recommended idle speed (neutral)		450 - 500				

ENGINE—PISTONS

Material	Aluminum alloy					
Description and finish	U-slot, elliptically-turned, tin-plated	Thermally controlled by steel band, horizontal slot, elliptically-turned, tin-plated				
Weight (piston only) oz.	15.8	18.5	ϕ (b) 21.5	ϕ (c) 21.4		

* Max. bhp (brake horsepower) and max. torque corrected as defined by SAE Engine Test Code.

(Continued)

Rev. Form 6-57

Carburetors: 1-2B=one two-barrel, 1-4B=one 4-barrel, 2-4B=two 4-barrel, F.I.=fuel injector.

(a) 3.5625 except 3.875 between 2-3 and 4-5.

ϕ (b) Later models - 21.4 oz.

ϕ (c) Later models - 21.3 oz.

AMA Specifications – Passenger Car

MAKE OF CAR	DODGE	MODEL YEAR	1958	DATE ISSUED	Sept. 1957	REVISED	Jan. 1958
MODEL	LD1	LD2	LD3	LD2 & LD3 D500 Package			

ENGINE PISTONS (Cont.)

Clearance (limits)	Top land	.030	.028 - .033	.042 - .047
	Skirt	Top	---	.0005 - .0015
		Bottom	.0007	---
Ring groove depth	No. 1 ring	.17	.19	.21
	No. 2 ring	.17	.19	.21
	No. 3 ring	.17	.19	.20
	No. 4 ring	.17	None	

ENGINE—RINGS

Function (top to bottom)	No. 1, oil or comp.	Compression		
	No. 2, oil or comp.	Compression		
	No. 3, oil or comp.	Oil		
	No. 4, oil or comp.	Oil	None	
Compression	Description - material, type, coating, etc.	Cast iron, std. type, #1 chrome plate, #2 tin plated	Cast iron, low taper and twist, tin plated	Cast iron, standard taper and twist, tin plated
	Width	.093	.078	
	Gap	.010 - .020		.013 - .025
Oil	Description - material, type, coating, etc.	Cast iron, single-piece unit		
	Width	.155	.186	.188
	Gap	.010 - .020		.013 - .025
Expanders	None	Low tension, hump	Standard tension, hump type	

ENGINE—PISTON PINS

Material	High-manganese steel			
Length	2.75	3.07	3.44	
Diameter	.859	.922	1.0935	
Type	Locked in rod, in piston, floating, etc.	Floating		Press-fit in rod
	Bushing	In rod or piston	Rod	
		Material	Bronze on steel	
Clearance	In piston	.0000 - .0005	.0000 - .0003	.00015 - .00065
	In rod	.0001 - .0002	.0001 - .0004	.0007 - .0012 Interference
Direction & amount offset in piston	None		.06 Right	

ENGINE—CONNECTING RODS

Material	High-manganese forging steel		Drop-forged steel	
Weight (oz.)	27.9	24.0	28.6	
Length (center to center)	7.81	6.62	6.36	
Bearing	Material & Type	Bi-metal grid		Lead-base babbitt on steel (a) ϕ
		Removeable, precision type		
	Overall length	1.00	.811	.927
	Clearance (limits)	.0005 - .0015		
End play	.006 - .011	.006 - .014 (2 rods)		.009 - .017 (2 rods)

(a) On D-500 Special Police Cars only - bi-metal grid. ϕ

AMA Specifications – Passenger Car

MAKE OF CAR	DODGE	MODEL YEAR	1958
MODEL	LD1	LD2	LD3
		DATE ISSUED	Sept. 1957
		REVISED	LD2&LD3 D500 Package; LD3

ENGINE—CRANKSHAFT

Material		Drop-forged steel			
Vibration damper type		Rubber-dynamic	None	Rubber-dynamic	
End thrust taken by bearing (No.)		#4-Rear	#3-Center		
Crankshaft end play		.003 - .007	.002 - .007		
Main bearing	Material & type		Lead-base babbitt on steel. (a) Removable, precision type.		
	Clearance		.0005 - .0015		
	Journal dia. and bearing overall length	No. 1	2.50 x 1.24	2.50 x .842	2.63 x .94
		No. 2	2.50 x 1.03	2.50 x .842	2.63 x .94
		No. 3	2.50 x 1.03	2.50 x 1.09 (a)	2.63 x 1.22 (a)
		No. 4	2.50 x 1.87 (a)	2.50 x .842	2.63 x .94
		No. 5	None	2.50 x 1.56	2.63 x .94
		No. 6	None		
No. 7		None			
Dir. & amt. cyl. offset		Left 0.125	None		
Crankpin journal diameter		2.06	2.25	2.38	

ENGINE—CAMSHAFT

Location		Right side	Center of "V" above crankshaft		
Material		Hardenable cast iron, with cams and drive gear for distributor and oil pump cast integrally			
Bearings	Material	(b)	Lead-base babbitt on steel		
	Number	4	5		
Type of drive	Gear or chain		Chain		
	Crankshaft gear or sprocket material		High-manganese steel		
	Camshaft gear or sprocket material		Cast iron		
	Timing chain	No. of links	48	68	50
		Width?	1.02	1.12	.88
		Pitch	.50	.375	.50

ENGINE—VALVE SYSTEM

Hydraulic lifters (Std, opt, NA)		NA	Standard	
Special provision for valve rotation (Intake, exhaust)		None	Low-friction lock on exhaust	
Rocker ratio		Not applicable	1.50 to 1	
Operating tappet clearance (Indicate hot or cold)	Intake	.010 (Hot)	Not applicable	
	Exhaust	.010 (Hot)	Not applicable	
Timing marks on fly-wheel, damper, other		Vibration damper	Fan drive pulley	Vibration damper

(a) Thrust bearings are tin-base babbitt on steel.

(Continued)

Rev. Form 6-57

(b) #1, #2, #3 - Lead base babbitt on steel; #4 cast iron (bored in block).

AMA Specifications – Passenger Car

Page 6

MAKE OF CAR	DODGE	MODEL YEAR	1958	DATE: ISSUED	Sept. 1957	REVISED	Jan. 1958
MODEL	LD1	LD2-L	LD2-M	LD3	LD2 & LD3 D500 Package		

ENGINE—LUBRICATION SYSTEM (cont.)

Oil pump type	Rotary		
Normal oil pressure (lb. @ engine rpm)	40-45 @ 1500	40-65 @ 2000	50-65 @ 1500
Oil pressure sending unit (electric or mechanical)	Mechanical		
Type oil intake (floating, stationary)	Stationary		
Oil filter system (full flow, partial, other)	Bypass	Shunt	Full flow
Filter replacement (element, complete)	Element	Element	Complete
Capacity of crankcase, less filter-refill (qt.)	5		4
Oil grade recommended (SAE viscosity and temperature range)	Above +32° F	SAE 30, SAE 20W-40, or SAE 10W-30	
	As low as +10° F	SAE 20W, SAE 20W-40, or SAE 10W-30	
	As low as -10° F	SAE 10W, SAE 10W-30, or SAE 5W-20	
	Below -10° F	SAE 5W, or SAE 5W-20	
Oil type recommended	API Classification MS		

ENGINE—EXHAUST SYSTEM

Type (single, single with cross-over, dual, other)	Single	Single with crossover(a)	Dual (b)	Dual
Muffler No. & type (reverse flow, straight thru, separate resonator)	One; Reverse flow		Two; Reverse flow	
Exhaust pipe dia. (O.D.)	None	1.88 x .083	None	
Branch wall thickness	2 x .083	2.25 x .083	2 x .083	2.25 x .083
Main wall thickness	1.75 x .048	2 x .048	1.75 x .048	2 x .048
Tail pipe diameter (O.D. & wall thickness)				

ENGINE—FUEL SYSTEM

(See Supplement to Page 6 for Details of Fuel Injection, Supercharger, etc. if used)

Induction type: Carburetor, fuel injection, supercharger.	Carburetor			
Fuel Tank	All except Suburbans - 20; Suburbans - 22			
Capacity (gals.)				
Filler location	Left rear fender			
Fuel Pump	Mechanical			
Type (elec. or mech.)				
Locations	Right front of engine			
Pressure range	6 - 7 psi			
Vacuum booster (std., optional, none)	None			
Fuel Filter	Plastic	Plastic and ceramic		
Type				
Locations	Fuel tank and carburetor		Fuel tank and fuel pump	
Make & Model No.	(c)	(d)	(e)	(k) Carter AFB-2642S (f)
Number & Type Downdraft	One dual		One 4-barrel	(g)
Barrel size	1.31	1.44		(h)
Choke type	Integral	Remote in manifold crossover (j)		
Intake manifold heat control (exhaust or water)	Exhaust			
Air clnr. type	Paper element			
Standard				
Optional	None			

- (a) Dual on LD2-L1-27 Convertible. (b) Single on LD3-L Suburbans. Rev. Form 6-57
 (c) Stromberg WW3-159; w/PowerFlite WW3-160. (d) Stromberg WW3-163; w/auto trans WW3-164.
 (e) Carter WCFB-2660S. (f) With 2 carburetors - Carter, Front AFB-2652S, Rear AFB-2653S.
 (g) One or two 4-barrel. (h) One carburetor - 1.44; two carburetors - Primary 1.44, Secondary 1.56 each carburetor. (j) With 2 carburetors: Integral on rear, none on front.
 (k) On LD3 with manual transmission - Carter AFB-2773-S.

AMA Specifications – Passenger Car

Sept. 1957

MAKE OF CAR DODGE **MODEL YEAR** 1958 **DATE ISSUED** 1957 **REVISED** _____
MODEL _____

	LD1		LD2											
Std	PS	Std	PS	AC	PS&AC	Std	PS	AC	PS&AC	LD3 and D500 Package	Std	PS	AC	PS&AC

ENGINE—COOLING SYSTEM

Type (pressure system, atmospheric, other)		Pressure-vent												
Radiator cap relief valve pressure		14 psi												
Circulation thermostat	Type (choke, bypass)	Pellet												
	Starts to open at (°F)	157 - 162												
Water pump	Type (centrifugal, other)	Centrifugal												
	Number of pumps	One												
	Drive (V-belt, other)	V-Belt												
	Bearing type	Sealed ball bearing												
By-pass recirculation type (internal, external)		Internal												
Radiator core type (cellular, tube and fin, other)		Cellular or fin-and-tube												
Cooling system capacity	With heater (qt.)	14							21					17
	Without heater (qt.)	13							20					16
	Opt. equipment-specify (qt.)	None												
Water jackets full length of cylinder (yes, no)							Yes						No	
Water all around cylinder (yes, no)		No											Yes	
Radiator hose	Lower	Number and type (molded, straight)	One, molded											
		Inside diameter	1.5											
	Upper	Number and type (molded, straight)	One, molded											
		Inside diameter	1.5											
	By-pass	Number and type (molded, straight)	None											
		Inside diameter	- - -											
Fan	Number of blades & Spacing	Four, 76-104°					Four, 76-104° (a)							
	Diameter	17" (sq tip)					18" (curved tip)							
	Ratio-fan to crankshaft rev.	0.95												
	Fan cutout type	None												
	Bearing type	See "Water Pump"												
*Drive belts (Indicate belt used by letter)	Fan	A	B	D	D	E	E	H	H	J	J			
	Generator	A	B	D	D	2F	2F	H	H	2K	2K			
	Water Pump	A	B	D	D	E	E	H	H	J	J			
	Power Steering			C			G			2F			L	L
	Air Conditioning							2F	2F			2K	2K	

(a) With AC - Six, 45-75-60°

Rev. Form 6-57

*Drive Belt Dimensions	A	B	C	D	E	F	G	H	J	K	L
Angle of V	38 - 42°										
Nominal length (SAE)	40.0	38.63	40.0	57.38	37.25	*71.38	38.0	56.5	36.88	68.75	41.75
Width	.375	.375	.5	.375	.375	.375	.5	.375	.375	.375	.5

(PS=Power steering, AC=Air conditioning, PS&AC=Power steering and air conditioning)
 *With 40-amp generator 72.75.

AMA Specifications – Passenger Car

Page 8

MAKE OF CAR DODGE	MODEL YEAR 1958	DATE ISSUED Sept. 1957	REVISED
MODEL	LD1	LD1 with PowerFlite	LD2 LD3 and D500 Package

ELECTRICAL—SUPPLY SYSTEM

Battery	Make and Model	*A-L 11-HS-50, Wil HO-11-50, or Gld 11-OE-53		A-L 11-HS-60 or Wil HO-11-60*	
	Voltage Rtg. & Plates/cell	12V, 9		12V, 11	
	SAE Designation & Amp Hr. Rtg.	*A-L and Wil - None, 50; Gld - None, 53		None, 60	
	Location	Under hood, left side			
	Terminal grounded	Negative			
Generator	Make	Auto-Lite			
	Model	GJC-7012-A			
	Type	Shunt wound			
	Ratio—Gen. to Cr/s rev.	2.12 : 1	2 : 1		
	Gen. cut-in—engine rpm	615	650		
Regulator	Make	Auto-Lite			
	Model	VRX-6201-A			
	Type	Current and voltage control			
	Cutout relay	Closing voltage @ generator rpm	13.0 - 13.8 @ 1300		
		Reverse current to open	Contacts open at 0 - 6-amp discharge at 8.2 - 9.3 volts after 10-amp discharge		
	Regulated	Voltage	14.28 - 14.88		
		Current	30 - 40		
	Voltage test conditions	Temperature	70° F		
		Load	Run 15 min at 7.0 amp - Voltage regulator check		
Other		Additional 15 min at rated output - Current regulator check			

ELECTRICAL—STARTING SYSTEM

Starting motor	Make	Auto-Lite			
	Model	MDM-6001	MDL-6004	MDL-6003 MDT-6001	
	Rotation (drive end view)	Clockwise			
	Engine cranking speed	Cold - 35 rpm; Hot - 150 rpm			
	Test conditions	Cold: SAE 5W at -20° F Hot: SAE 30 with completely-warmed engine			
	Lock test	Amps	210	225	350
		Volts	4	4	4
		Torque (lb. ft.)	5	6	8.5
	No load test	Amps	50	60	58
		Volts	11	11	11
RPM (min.)		3600	3400	3800	
Motor control	Switch (solenoid, manual)	Bendix (anti-kickout)			
	Starting procedure	<p>WITH MANUAL AND POWER-FLITE TRANSMISSIONS: Depress accelerator pedal about one-third and turn ignition key beyond "Ignition On" position.</p> <p>WITH TORQUE-FLITE TRANSMISSION: Depress accelerator pedal about one-third and press "N" (Neutral) transmission push button to "Extreme In" position.</p>			

A-L = Auto-Lite, Wil = Willard, Gld = Gould.

Rev. Form 6-57

AMA Specifications – Passenger Car

MAKE OF CAR	DODGE	MODEL YEAR	1958	DATE: ISSUED	Sept. 1957	REVISED	Jan. 1958 ϕ
MODEL	LD1 Dual Carb	LD2 2 or 4-Bbl	LD3 One 4-Bbl	LD2 & LD3 One 4-Bbl	D500 Package Two 4-Bbl	Fuel Injector	

ELECTRICAL—STARTING SYSTEM (cont.)

Motor drive	Engagement type	Inertia follow-through drive		
	Pinion meshes (front, rear)	Front		
	Number of teeth	Pinion	9	
		Flywheel	172	
Flywheel tooth face width		.375		

ELECTRICAL—IGNITION SYSTEM

Coil	Make	Auto-Lite				
	Model	CAG-4001B	CAH-4001E	CAH-4001A		
	Amps	Engine stopped	2.4		3.1	
		Engine idling	1.8		2.5	
Distributor	Make	Auto-Lite				
	Model	IBR-4001	IBP-4002E	IBP-4005	IBS-4006B	IBS-4009
	Spark adv. centrifugal (crankshaft degrees)	Start (rpm)	500-900		600-800	
		Intermediate points @ rpm	0-4 @ 900		0-4 @ 850	
		Max. @ rpm	11-15 @ 2100		8-12 @ 1300	
	Spark adv. vacuum (crankshaft degrees)	Start (in. Hg)	0 @ 5.5-7		0 @ 6-7.5	
		Intermediate points (in. Hg)	9 @ 8 - 11		10 @ 9-10	
		Max. (in. Hg)	17-21 @ 16		20-24 @ 14	
	Breaker gap (in.)	.018- .022		.015 - .018 ϕ		
	Cam angle (deg.)	39 + 3		27 - 32		36-40 (total; dbl breaker)
Breaker arm tension (oz.)	17 - 20					
Crankshaft deg. @ rpm.	2 BTC @ 500		6 BTC @ 500		8 BTC @ 500	
Timing	Mark location	(a)	(b)	Vibration damper		
	Cylinder numbering system (see page 2)	- - -		Left bank: 1 - 3 - 5 - 7		
					Right bank: 2 - 4 - 6 - 8	
Firing order (see page 2)	1-5-3-6-2-4		1-8-4-3-6-5-7-2			
Spark Plug	Make and model	Auto-Lite Resistor				
		AR-51	AGR-42	AR-42	AR-32	
	Thread (mm)	14				
	Tightening torque (lb. ft.)	30-32				
	Gap	.035				
Cable	Conductor type	Stranded Copper				
	Insulation type	Rubber with neoprene jacket				
	Spark plug protector	Neoprene cover				

ELECTRICAL—SUPPRESSION

Description	<p style="text-align: right;">Spark plugs: 10,000-ohm integral resistor</p> <p style="text-align: right;">Distributor: 10,000-ohm integral resistor</p>
-------------	---

- (a) Vibration damper.
- (b) Fan drive pulley.

AMA Specifications -- Passenger Car

Sept. 1957

MAKE OF CAR DODGE MODEL YEAR 1958 DATE ISSUED 1957 REVISED _____

MODEL _____ All Models - LD1, LD2 and LD3

ELECTRICAL—INSTRUMENTS AND SWITCHES

Speed-ometer	Make	Stewart Warner
	Trip odometer (yes, no)	No
Charge indicator-type		Ammeter
Temperature indicator-type		Electric, magnetic
Oil pressure indicator-type		Bourdon tube
Fuel indicator-type		Electric, magnetic
Other		None
Ignition switch	Identify positions in order and circuits controlled	Center Position - Off 1st Position Clockwise - Ignition and accessory circuit only 2nd Position Clockwise - Starter and ignition circuit only (a) 1st Position Counter-clockwise - Accessory circuit only
	Provision for illumination	None
	Location	Right of steering column
Main lighting switch	Identify positions and lights controlled	Left Position - Off 1st Position Clockwise - Instrument, tail, license plate, and parking lamps 2nd Position Clockwise - Instruments, head, tail, and license plate lamps
	Locations and lamps controlled	Instrument lamp switch - Left of steering column on instrument panel concentric with headlamp switch, variable all instruments; Stop lamp switch - In master cylinder; Dome lamp - Manual switch on instrument panel, automatic switches in front doors (on all doors of Custom Royals); Direction signal switch - Lever on steering column below wheel.
Other switches	Locations and devices controlled	Windshield wiper switch - One-speed, right of steering column (Variable speed special equipment). Heater switch - Two-speed, right of steering column Defroster control - Right of steering column Starter switch - Neutral push button (extreme in position) (b)
Windshield wiper	Make	Auto-Lite or (single speed only) General Industries
	Type	Electric
	Vacuum booster provision	None
	Washer provision	None
Horn	Type	Air note - Sea shell
	Number used	2
	Amp draw (each)	9 - 10

- (a) Models with PowerFlite or manual transmission only.
 (b) Models with TorqueFlite transmission only.

AMA Specifications – Passenger Car

MAKE OF CAR DODGE **MODEL YEAR** 1958 **DATE ISSUED** Sept. 1957 **REVISED** _____
MODEL _____ All Models – LD1, LD2, and LD3

ELECTRICAL—LAMP BULBS

Give quantity used and trade number, e.g., Headlamp 2-5400 S, dual headlight 2-4001, 2-4002. Indicate accessories which are not standard equipment by an asterisk following the numbers.

Headlamps & arrangement	Horizontal; 2-4001, 2-4002	
Headlamp beam indicator	1-57	
Parking light	2-1034 (a)	
Tail light	2-1034 (b)	
Stop light	2-1034 (b)	
Direction signal	Front	2-1034 (a)
	Rear	2-1034 (b)
	Indicator	2-57
License plate light	1-67	
Instrument light	2-57	
Ignition lock light	None	
Back up light	2-1073*	
Dome light	1-1004 (c)	
Clock light	1-1816*	
Radio light	1-1816*	
Glove compartment light	1-57	
Speedometer	3-57	
Transmission Control	1-57	
Handbrake Indicator	1-68	
Map Light	1-90*	

ELECTRICAL—FUSE & CIRCUIT BREAKER DATA

Use trade number of fuse, e.g., SFE-10. Indicate circuit breaker by ampere capacity suffixed by letters "C.B." e.g., 30 C.B. Where fuse or circuit breaker protects multiple circuits indicate first use by a letter and repeat the same letter for all units protected by the same fuse or circuit breaker, e.g., Parking lights SFE-10 (a), Direction Indicator same as (a).

Headlamp	22.5 CB (A)
Headlamp beam indicator	Same as (A)
Parking light	Same as (A)
Tail light	15 CB (B)
Stop light	Same as (B)
Direction indicator	None
License plate light	Same as (B)
Instrument light	Same as (B)
Ignition light	None
Back up light	Same as (B)
Dome light	Same as (B)
Clock	SFE-2
Clock light	Same as (B)
Radio	SFE-7.5
Glove compartment light	Same as (B)
Map Light	Same as (B)
Windshield Wiper	5 CB (C); Variable Speed - 6 CB (D)
Window Lift	30 CB (E)
Seat Adjuster	40 CB (F)

(a) Integral units. (b) Integral units, dual-filament.
(c) 2 on Hardtops and 3-seat Suburbans.

AMA Specifications – Passenger Car

MAKE OF CAR	DODGE	MODEL YEAR	1958
		DATE: ISSUED	Sept. 1957
MODEL	LD1	LD2	LD3
			REVISED LD2 & LD3 D500 Package

DRIVE UNITS—CLUTCH (Manual Transmission)

Make & type	Auburn (Opt) Dry plate	Borg & Beck, Dry plate			
Type pressure plate springs	Coil				
Total plate pressure (lb.)	1280	1206	1920	2013	
No. of clutch driven discs	One				
Clutch facing	Material	Molded woven asboestos			
	Outside & inside dia.	9.25 x 6.00	10.00 x 6.00	10.50 x 6.50	11.00 x 6.50
	Total eff. area (sq.in.)	77.8	100.5	106.8	123.7
	Thickness	.114	.125		
	Engagement cushioning method	Flat springs, crimped			
Release bearing	Type & method of lubrication	Sealed ball bearing, permanently lubricated			
Torsional damping	Methods: springs, friction material	Coil springs			

DRIVE UNITS—TRANSMISSIONS

Manual (std. or opt.)	Standard	None
Manual with overdrive (std. or opt.)	None	
Automatic (std. or opt.)	PowerFlite optional	---
	---	TorqueFlite optional
		TorqueFlite standard

DRIVE UNITS—MANUAL TRANSMISSION

Number of forward speeds	3			
Transmission ratios	In first	2.50	2.31	
	In second	1.68	1.55	
	In third	1.00	1.00	
	In fourth	None		
	In reverse	3.20	2.96	
Synchronous meshing, specify gears	2nd and 3rd			
Lubricant	Capacity (pt.)	2.75		
	Type recommended	Multi-purpose gear oil, API classification GL-4		
	SAE viscosity number	Summer	SAE 80	
		Winter	Above -10° F, SAE 80	
	Extreme cold	Below -10° F, SAE 75		

AMA Specifications – Passenger Car

MAKE OF CAR DODGE	MODEL YEAR 1958	DATE: ISSUED Sept. 1957	REVISED	
MODEL	LD1	LD2-L	LD2-M	LD3 D500 Package

DRIVE UNITS—MANUAL TRANSMISSION WITH OVERDRIVE

For transmission data see manual transmission section

Overdrive	Type (planetary or other)		Not applicable		
	Manual lockout (yes, no)		---		
	Downshift accelerator control (yes, no)		---		
	Minimum cut-in speed		---		
	Gear ratio		---		
	Lu- bri- cant	Capacity (Overdrive only)		---	
		Separate filler (yes, no)		---	
		Type recommended		---	
		SAE vis- cosity number	Summer	---	
			Winter	---	
Ext. cold	---				

DRIVE UNITS—AUTOMATIC TRANSMISSION

Trade name	PowerFlite	(a)	TorqueFlite		
Type describe	Torque converter with gears				
Method of Selection (Lever, Push Button or other)	Pushbutton				
Selector Pattern	(PowerFlite) R N D L		R N D 1 2 (TorqueFlite)		
List gear ratios Selector Pattern and indicate which are used in each selector position	PowerFlite R 2.39:1 - Reverse D 1.00:1 - Drive L 1.72:1 - Drive & Low		TorqueFlite R 2.20:1 - Reverse D 1.00:1 - Drive 2 1.45:1 - Drive & 2 1 2.45:1 - Drive, 2, & 1		
Max. upshift speeds—drive range (b)	50-55 mph	(c)	74-78 mph		
Max. kickdown speeds—drive range (b)	43-47 mph	(d)	70-75 mph		
Torque converter	Number of elements		3		
	Max. ratio at stall at engine rpm	Early Cars	2.6 at 1330	(e)	(f)
		Later Cars			2.3 @ 1875 (g)
Type of cooling (air, water)		Air-cooled		Water-cooled	
Lubricant	Capacity—refill (pt.)	20	*PF - 20; TF - 18		21
	Type recommended	Automatic transmission fluid, Type A			
Special transmission features	Incorporates spring-loaded hydraulic valve to prevent accidental reverse engagement				

* PF = PowerFlite, TF = TorqueFlite

Rev. Form 6-57

- (a) PowerFlite and TorqueFlite optional only.
- (b) With standard axle ratios and tires.
- (c) With PowerFlite 57-62 mph, with TorqueFlite 74-78 mph.
- (d) With PowerFlite 50-54 mph, with TorqueFlite 70-75 mph.
- (e) With PowerFlite - 2.7 at 1855; with TorqueFlite - 2.7 at 1700.
- (f) With PowerFlite - 2.7 at 1710; with TorqueFlite - 2.7 at 1925.
- (g) One 4-bbl carb - 2.3 @ 1930; two 4-bbl carbs - 2.3 @ 1880.
- (h) One 4-bbl carb - 2.2 @ 1830; two 4-bbl carbs - 2.2 @ 1790.

AMA Specifications – Passenger Car

MAKE OF CAR	DODGE	MODEL YEAR	1958	DATE ISSUED	Sept. 1957	REVISED	
MODEL	LD1	LD2-L	LD2-M	LD3	D500 Package		

DRIVE UNITS—PROPELLER SHAFT

Number used		One		
Type (exposed, torque tube)		Exposed		
Outer diameter x length* x wall thickness (a)	Manual transmission	3.0 x 58.81	3.5 x 59.02	3.5 x 59.03
	OverDrive transmission PowerFlite	3.0 x 58.81	3.5 x 59.02 3.25 x 59.02(b)	None
	Automatic transmission TorqueFlite	None	3.25 x 58.86	3.25 x 58.96 3.5 x 58.96(b)
Inter-mediate bearing	Type (plain, anti-friction)	None		
	Lubrication (fitting, prepack)	Not applicable		
Universal joints	Make	Own (Detroit)		
	Number used	Two		
	Type (ball and trunnion, cross, other)	Front: Ball and trunnion Rear: Cross		
	Bearing	Type (plain, anti-friction)	Anti-friction	
Lubric. (fitting, prepack)		Front: Clean and repack Rear: Prepack		
Drive taken through (torque tube or arms, springs)		Rear Springs		
Torque taken through (torque tube or arms, springs)		Rear Springs		

DRIVE UNITS—REAR AXLE (See Supplement to Page 14 for optional axles.)

Description - (incl. limited slip differential)		Conventional type: Semi-floating, hypoid, 1 2-pinion differential with single-piece case			
Drive Pinion Offset		1.5"			
No. of differential pinions		Conventional differential - 2			
Gear ratio and No. of teeth	Automatic transmission PowerFlite	3.73 (41-11)	3.31 (43-13)	None	Not applicable
	OverDrive trans. TorqueFlite	None	3.15 (41-13)		Not applicable
	Manual transmission	3.9 (43-11)	3.54 (39-11)	3.31 (43-13)(c)	Not applicable
Ring gear pitch diameter & O.D.		8.25 and 8.25	8.75 and 8.75		
Pinion adjustment (shim, other)		Solid shim (washer)			
Pinion bearing adj. (shim, other)		Shims			
Wheel bearing type		Tapered roller bearing			
Lubricant	Capacity (pt.)	3.25	3.5		
	Type recommended	Multi-purpose gear lubricant, API Classification GL-4 (d)			
	SAE viscosity number	Summer	Above -10° F, SAE 90		
		Winter	Below -10° F, SAE 80		
	Extreme cold	Below -30° F, SAE 75			

*Center to center of universal joints, or to centerline of rear attachment.

- (a) Wall thickness .065 - all shafts. (b) Optional. (c) Suburbans - 3.54.
 (d) For "Sure-Grip" limited-slip type - Mopar Rear Axle Lubricant.

AMA Specifications -- Passenger Car

Supplement
to Page 14

MAKE OF CAR DODGE MODEL YEAR 1958 DATE ISSUED Sept. 1957 REVISED Jan. 1958 ϕ

SUPPLEMENTARY INFORMATION

OPTIONAL REAR AXLE RATIOS

MODEL	LD1	LD2-L	LD2-M	LD3 Except Sta. Wagons	LD3 Sta. Wagons	
CONVENTIONAL TYPE (Available in all ratios and applications listed.)						
Gear Ratio and No. of Teeth	PowerFlite Transmission ϕ	--	3.15 (41-13)	--	--	--
		3.54 (39-11)	3.54 (39-11)	--	--	--
		3.9 (43-11)	--	--	--	--
	TorqueFlite Transmission	--	2.93 (41-14)	2.93 (41-14)	2.93 (41-14)	2.93 (41-14)
		--	3.31 (43-13)	3.31 (43-13)	3.31 (43-13)	3.31 (43-13)
	Manual Transmission	--	--	--	3.15 (41-13)	--
		--	3.31 (43-13)	3.31 (43-13)	--	3.31 (43-13)
		--	--	--	3.54 (39-11)	--
		3.73 (41-11)	3.73 (41-11)	3.73 (41-11)	--	3.73 (41-11)
		4.1 (41-10)	--	--	--	--

SURE-GRIP (LIMITED-SLIP) TYPE (Available in all ratios and applications listed above for V-8 models only.)

Description	Torque-bias type, with 4 pinions and 2 separate differential pinion shafts, cam-actuated friction clutches located back of each differential side gear
-------------	--

AMA Specifications – Passenger Car

MAKE OF CAR	DODGE	MODEL YEAR	1958	DATE: ISSUED	Sept. 1957	REVISED	Jan. 1958
MODEL	LD1	LD2-L	LD2-M	LD3 Except Sta. Wagons	LD3 Station Wagons		

DRIVE UNITS—WHEELS

Type & material	Disc; pressed steel		
Rim (size and flange type)	14 x 5 K (a)	14 x 5.5 K	14 x 5.5 K(b)
Attachment	Type (bolt or stud) Stud		
	Circle diameter 4.5		
	Number and size Five, 1/2-20 N.F.		

DRIVE UNITS—TIRES (h) ϕ

Size (L-102) & ply rating	Standard Tubeless 4Ply	*BSW 7.50 x 14 (c)(d)	*BSW 8.00 x 14 (d)
	Optional Tubeless 4Ply	*B or WSW 8.00 x 14	*B or WSW 8.50 x 14
Type tires - nylon, etc.		Standard - Rayon; Optional - Rayon or Nylon, also 6-ply Rayon	
Rev/mile at 30 mph		776 with 7.50 x 14; 760 with 8.00 x 14; 746 with 8.50 x 14	
Inflation press. (cold)	Front (psi)	24	22
	Rear (psi)		24 (e)

BRAKES—SERVICE

Type	Hydraulic, internal expanding, calculated-contour variable-depth web, "Total-Contact" brake shoes			
Power brake type	Vacuum - optional			
Effective area (sq. in.) (g)	207	ϕ 207 (f)	230	
Percent brake effectiveness—front 60				
Drum	Diameter	Front (g) 11"		
		Rear (g) 11"		
Type and material		Composite		
Bonded or riveted		Bonded		
Brake lining	Front Shoe	Material	Molded asbestos	
		Size (length x width x thickness)	Front wheel 11.5 x 2.5 x 0.20	
			Rear wheel 11.5 x 2.0 x 0.20 (f) 11.5 x 2.5 x 0.20	
	Segments per shoe		One	
	Rear Shoe	Material	Molded asbestos	
		Size (length x width x thickness)	Front wheel 11.5 x 2.5 x 0.20	
Rear wheel 11.5 x 2.0 x 0.20 (f) 11.5 x 2.5 x 0.20				
Segments per shoe		One		
Wheel cylinder bore	Front	1.125		
	Rear	1.125		
Master cylinder bore		1.125		
Available pedal travel		6"; with optional power brakes - 4.63"		
Line pressure at 100 lb. pedal load		650 psi; with optional power brakes - 1150 psi		
Shoe clearance adjustment		No major adjustment required		

- (a) Except 14 x 5.5 K on Convertible. (b) 14 x 6 K on 9-passenger models. Rev. Form 6-57
 (c) Except 8.00 x 14 on Convertible. (d) Whitewalls optional in all sizes.
 (e) Up to 28 psi under heavy loads. (f) On Convertibles and 4-door Hardtops, 11.5 x 2.5 x 0.20; effective area - 230 sq in.
 (g) 12 x 2.5 brakes optional on all models; effective area - 251 sq in. ϕ * BSW = Black Sidewall, WSW = White Sidewall
 (h) Captive-Air tires available on all models.

AMA Specifications – Passenger Car

Page 16

MAKE OF CAR <u>DODGE</u>	MODEL YEAR <u>1958</u>	DATE: ISSUED <u>Sept. 1957</u>	REVISED <u>Jan. 1958</u> ϕ
		<u>LD1, LD2, and LD3 - All Models</u>	
MODEL	<u>Manual Transmission</u>	<u>Automatic Transmission</u>	

BRAKES—PARKING

Type of control	T-handle, multiple-pawl ratchet		
Location of control	Under instrument panel, left side of steering column		
Operates on	Transmission output shaft		
If separate from service brakes	Type (internal or external)	External	Internal
	Drum diameter	6"	7"
	Lining size (length x width x thickness)	ϕ 16.68 x 2 x 0.16	2 Shoe, ea 6.53 x 2 x 0.16 ϕ

FRAME or UNITIZED CONSTRUCTION

Type and description	Welded, double-channel box-section side rails; lateral crossmembers. X-type crossmember on Convertible
----------------------	--

SUSPENSION—GENERAL

Provision for car leveling (a)	Mechanical, by manual adjustment of torsion bar anchor bolt	
Provision for brake dip control	By inclined front upper control arms and unsymmetrical rear springs	
Provision for acc. squat control	By unsymmetrical rear springs	
Special provisions for car jacking	None	
Shock absorber front & rear	Type	Direct
	Make	Own
	Piston dia.	1 inch
Other special features	Front torsion bars are combined with outboard-mounted highly unsymmetrical semi-elliptical rear leaf springs	

SUSPENSION—FRONT

Type and description	Independent, lateral, non-parallel control arms with torsion bars
----------------------	---

(a) Front only.

(Continued)

Rev. Form 6-57

AMA Specifications – Passenger Car

MAKE OF CAR DODGE **MODEL YEAR** 1958 **DATE: ISSUED** Sept. 1957 **REVISED** Jan. 1958

MODEL LD1, LD2, and LD3

SUSPENSION FRONT (cont.)

Spring	Type	Torsion bar	
	Material	Chromium-alloy steel	
	Size (coil design height & I.D.; bar length x dia.)	44.6 x 1.04 (Suburbans 44.6 x 1.0)	
	Spring rate (lb. per in.)	Not applicable	
	Rate at wheel (lb. per in.) (a)	125 (Suburbans 105)	
	Design load (lb. @ design height)	Not applicable	
Stabilizer	Type (link, linkless, frameless)	None (Link on Suburbans)	
	Material & bar diameter	Not applicable (Suburbans: steel, .75)	

STEERING

Mechanical (std., opt., NA)			Standard	
Power (std., opt., NA)			Optional	
Wheel diameter			17"	
Turning diameter	Outside front	Wall to wall (l. & r.)	46'4" ∅	
		Curb to curb (l. & r.)	43'7"	
	Inside rear	Wall to wall (l. & r.)	∅ 27'8" (27'9" Suburban)	
		Curb to curb (l. & r.)	27'2" (27'1" Suburban)	
Outside wheel angle with inside wheel at 20°			18° 46'	
Mechanical	Gear	Type	Worm and three-tooth roller	
		Make	Own	
		Ratios	20.4	
		Gear Overall	29.97	
	No. wheel turns			5.2
Power	Type		Integral	
	Make		Own	
	Trade name		Constant Control	
	Gear	Type	Rack and sector	
		Ratios	15.7	
		Gear Overall	19.1	
	Pump driven by		Belt from C/S pulley	
	Overall torque ratio		140:1 average (mean) ∅	
Number wheel turns		3.5		
Linkage	Type		Symmetrical idler arm, equal length tie rods	
	Location (front or rear of wheels, other)		Rear	
	Drag link (trans. or longit.)		Transverse	
	Tie rods (one or two)		Two	

(a) Without tires

(Continued)

Rev. Form 6-57

AMA Specifications – Passenger Car

MAKE OF CAR DODGE **MODEL YEAR** 1958 **DATE ISSUED** Sept. 1957 **REVISED** _____
MODEL LD1 LD2 & LD3

STEERING (cont.)

Steering Axis	Inclination at camber (deg.)		$6\frac{1}{2}^{\circ}$ at 0°
	Bearings (type)	Upper	Ball joint
		Lower	Ball joint
	Thrust	Oil-impregnated sintered metal	
Wheel alignment (range and preferred)	Caster (deg.)		Mechanical steering: $+\frac{1}{4}^{\circ}$ $\pm\frac{1}{4}^{\circ}$ Power steering: $+3/4^{\circ}$ $\pm 3/4^{\circ}$
	Camber (deg.)		Left: $+\frac{1}{4}^{\circ}$ $\pm\frac{1}{4}^{\circ}$ (Prefer $3/8^{\circ}$) Right: 0° $\pm\frac{1}{4}^{\circ}$ (Prefer 0°)
	Toe-in (outside tread-inches)		$1/8" \pm 1/32"$
Steering spindle & joint type			Ball socket
Wheel spindle	Diameter	Inner bearing	1.25"
		Outer bearing	0.75"
	Thread size		$3/4-16$ N.F.
	Bearing type		Tapered roller

SUSPENSION—REAR

Type and description			Parallel, longitudinal leaf			
Drive and torq. taken through (see page 14)			Rear springs			
Spring	Type		Semi-elliptical			
	Material		Steel			
	Size (length x width, coil design height and I.D.; bar length & dia.)		57×2.5			
	Spring rate (lb. per in.)		95 (125 on Suburbans)			
	Rate at wheel (lb. per in.) (a)		130 (165 on Suburbans)			
	Design load (lb. at design height) (b)		RH-680at-.38; LH-720at-.38 RH-720at-.38; LH-760at-.38			
	Mounting insulation type		Rubber			
	If leaf	No. of leaves		4 (6 on Suburbans) 5 (6 on Suburbans)		
		Inserts	Type and size	2.5×2.5 front interliners; 2.5×3.5 rear interliners		
			Material	Wax impregnated fabric		
Shackle (comp. or tens.)		Compression				
Stabilizer	Type (link, linkless, frameless)		None			
	Material		Not applicable			
Track bar type			None			

- (a) Without tires
- (b) 2-Door Suburbans: RH 960 at -.38; LH-1000 at -.38
 4-Door Suburbans: RH 1000 at -.38; LH-1040 at -.38

AMA Specifications – Passenger Car

Page 19

MAKE OF CAR DODGE MODEL YEAR 1958 DATE ISSUED Sept. 1957 REVISED _____


BODY—GENERAL DEFINITIONS

NOTE: Included in the dimension definitions listed on this and the following pages are those which have been adopted by the S.A.E. These are indicated by a number following the type of dimension, e.g. L 3. Additional dimensions have been added by the AMA Specifications Body Subcommittee for inclusion in the Questionnaire. These are shown by an additional letter, e.g., HA. Symbol "a" added as suffix to SAE dimensions indicates an AMA modification. The dimensions are developed from the following basic points:

1. Front and rear seat free "A" points are taken 5" forward of vertical tangent to seat back 15" from center of body.
2. Front and rear seat "B" points are located on seat back 15" from center of body at height of horizontal tangent to top of seat cushion.
3. Front seat is in the full down and normal rearmost position.
4. Loaded position—5 passenger, front 300 lb., rear 450 lb.; includes spare wheel, tire and tools, and full complement of gas, oil, water, and tires to recommended pressure, etc.
5. C/L (centerline).
6. D. L. O. (daylight opening, exposed glass dimension - pages 21, 23 & 25).
7. Ramp breakover angle (page 21) is the supplement of the included ramp angle (180° minus the included ramp angle) over which a car can pass without hanging up.

MODEL	LD1-L 4-Door Sedan	LD2-L 4-Door Sedan	LD2-M, LD3-H 4-Door Sedan
-------	-----------------------	-----------------------	------------------------------

BODY—TRUNK DIMENSIONS

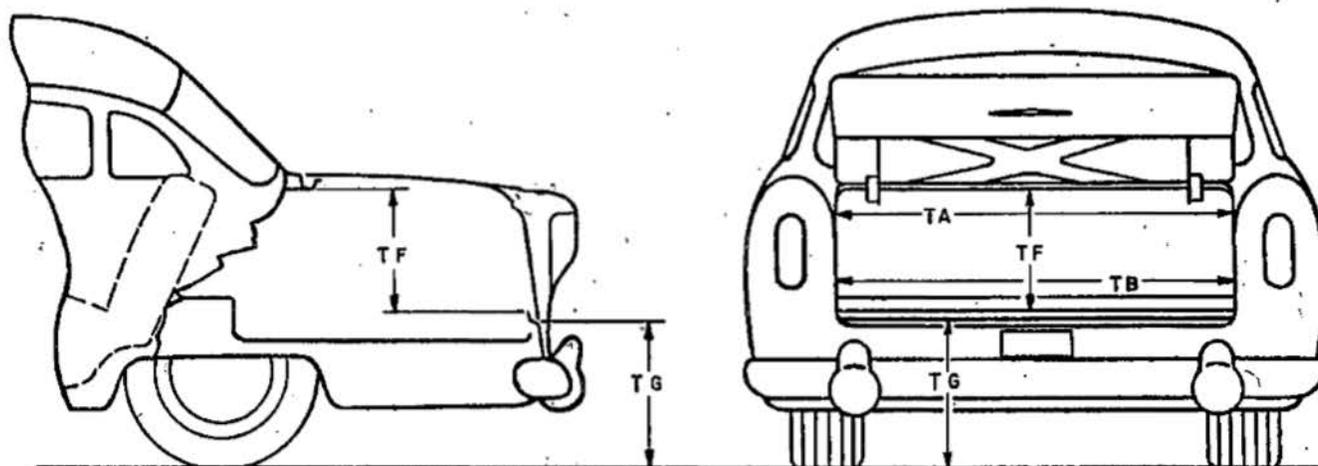


Usable trunk luggage capacity (see Section H1 of SAE Automotive Drafting Standards) (actual)	38.6 cu ft.		
TA—Width across the top	58.4		
TB—Width across the bottom	51.2		
TF—Vertical dimension at C/L from bottom to top of opening.	15.4		
TG—Vertical height from ground to trunk lower opening (normal surface of outside sheet metal - loaded)	20.3	19.3	19.7
Position of spare tire stowage	Horizontal on left side of trunk		
Method of holding lid open	Torsion bar		

AMA Specifications -- Passenger Car

Page 20

MAKE OF CAR DODGE **MODEL YEAR** 1958 **DATE ISSUED** Sept. 1957 **REVISED** Jan. 1958 ϕ
MODEL LD1, LD2, and LD3 - 4-Door Sedan

BODY--HEIGHT DIMENSIONS--INTERIOR


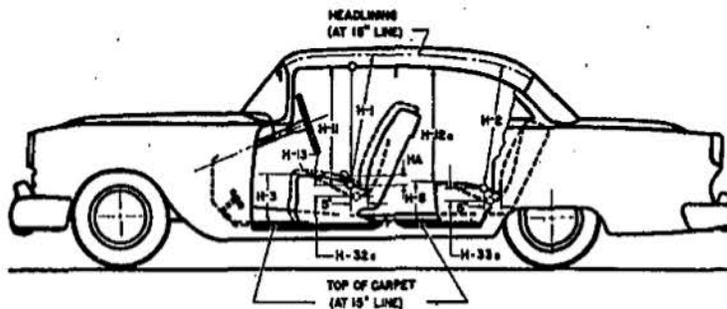


H1. Front headroom—from free "A" pt. to headlining at 8° back of vertical on 15" line. (For "A" pt. see note 1, page 19)	35.7
H2. Rear headroom—from free "A" pt. to headlining at 8° back of vertical on 15" line.	34.5
H3. Front cushion height above low point on floor carpet on 15" line (front edge of cushion).	10.8
H8. Rear cushion height above low point on floor carpet on 15" line (front edge of cushion).	12.0
H11. Entrance—front—cushion free "A" point to bottom windcord vertical.	31.2
H12a. Entrance—rear—top of cushion at vertical tangent to front of rear seat, to bottom of windcord in rear.	27.5
H13. Steering wheel clearance to seat cushion taken on arc (wheel turned for min. clearance).	6.0
HA. Front seat maximum vertical rise at free "A" point.	1.2 ϕ
HF. Front seat maximum vertical rise of free "A" point with multiple-position seat.	2.64 ϕ
H32a. Front seat depressed depth—vertical dimension from free "A" point to depressed "A" point.	4.0
H33a. Rear seat depressed depth—vertical dimension from free "A" point to depressed "A" point.	4.0

AMA Specifications – Passenger Car

MAKE OF CAR	DODGE	MODEL YEAR	1958	DATE: ISSUED	Sept. 1957	REVISED	Jan. 1958
MODEL	LD1-L	LD2-L	LD2-H, LD3-H	4-Door Sedan	4-Door Sedan	4-Door Sedan	

BODY—HEIGHT DIMENSIONS—EXTERIOR

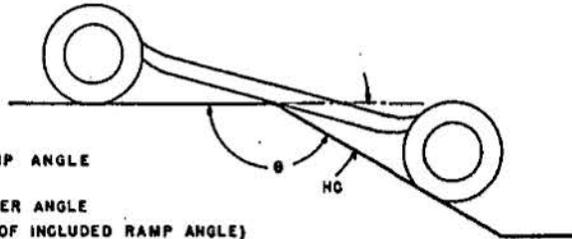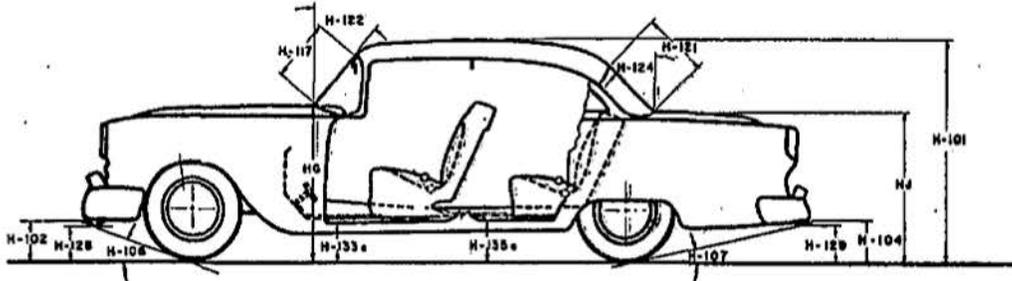

B - INCLUDED RAMP ANGLE
 HC - RAMP BREAKOVER ANGLE
 (SUPPLEMENT OF INCLUDED RAMP ANGLE)


H101. Overall height - loaded.	56.6		56.8
HB. Overall height - curb weight.	58.5	58.4	58.6
H102. Front bumper bottom to ground at normal section.	12.0 ϕ	11.9 ϕ	11.7 ϕ
H104. Rear bumper bottom to ground at normal section.	9.7		10.0
H106. Angle of appr.-fr. tire static loaded rad. to interfering pt. on fr. bumper, gd., other.	18.9° ϕ	18.7° ϕ	18.4° ϕ
H107. Angle of dep.-fr. tire static loaded rad. to interfering pt. on rr. bumper, gd., other.	9.8° ϕ		10.1° ϕ
HC. Ramp breakover angle.*	10.2°		10.4°
H117. Windshield DLO-slant height.	22.3		
H121. Backlight DLO*-max., slant height.	19.7		
H122. Windshield slope angle to vertical line on car axis.	50°		
H124. Backlight slope angle to vertical line on car axis.	53°		
H128. Ground to bottom of front bumper guard.	Not applicable		
H129. Ground to bottom of rear bumper guard.	15.3 ϕ	15.4 ϕ	15.7 ϕ
H133a. Bottom of front door to ground, min. dimension - car loaded.	11.1		11.3
H135a. Bottom of rear door to ground, min. dimension - car loaded.	10.8	10.7	11.0
HD. Min. road clear. (5 pass. load) & loc.	5.4 Frame side member		5.6 Frame side member
HE. Min. road clearance at rear axle.	7.4 ϕ	7.1 ϕ	7.4 ϕ
HG. Hood at rr. to grd.-vert. dim. excl. molding, fr. hood opening line at cowl (curb wt.)	40.4	40.3	40.5
HH. Max. ht., fr. grd. frt. of windshield (curb wt.)	40.9	40.8	41.0
HJ. Max. ht. fr. grd. back of r. window (curb wt.)	39.6	39.5	39.8

* See Notes, page 19.

AMA Specifications — Passenger Car

MAKE OF CAR DODGE **MODEL YEAR** 1958 **DATE ISSUED** Sept. 1957 **REVISED** Jan. 1958 ϕ
MODEL _____ LD1, LD2, and LD3 - All Models

BODY—LENGTH DIMENSIONS

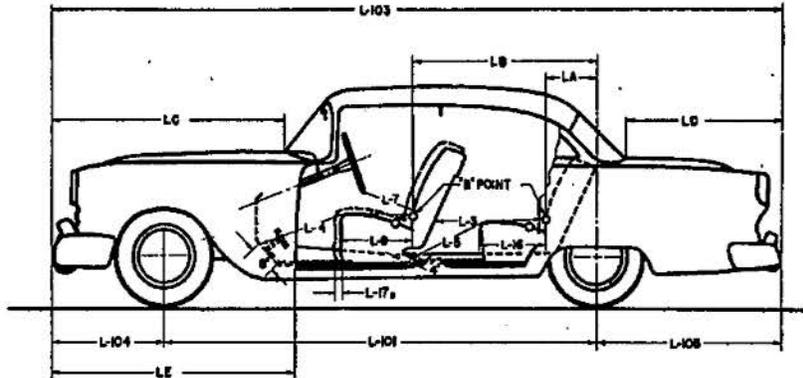

Interior	* L3. Rear compartment of front seat back to rear seat back.	31.0
	* L4. Leg room—front—ball of foot to top of seat to seat back—15" line.	45.5
	* L5. Leg room—rear—from ball of foot to top of seat cushion and to seat back†	42.5
	L7. Steering wheel clearance to seat back taken on arc.	15.0
	* L9. Front seat depth (front edge to vert. tan. to seat back on 15" line).	18.6
	* L16. Depth of rear seat (front edge to seat back).	18.6
	L17a. Total adjustment of front seat at front lower seat frame.	4.8 Manual; 5.0 Power ϕ
	LA. Rear seat "B" point to center line of rear axle.	20.2
	LB. Front seat "B" point to center line of rear axle.	57.8
	LC. Front of car to base of windshield.	58.8
LD. Rear of car to base of rear window or upper structure.	46.3	
LE. Front of car to front edge of front door.	64.1	
Exterior	L101. Wheelbase.	122.0
	L103. Overall length (bumper to bumper inc. guards).	213.8
	L104. Overhang—front including bumper guards	35.1
	L105. Overhang—rear including bumper guards.	56.7


* Dimension taken on 15" line—see notes 1 & 2, page 19.

AMA Specifications - Passenger Car

MAKE OF CAR DODGE MODEL YEAR 1958 DATE: ISSUED Sept. 1957 REVISED _____

MODEL _____ LD1, LD2, and LD3 - All Models

BODY—WIDTH DIMENSIONS

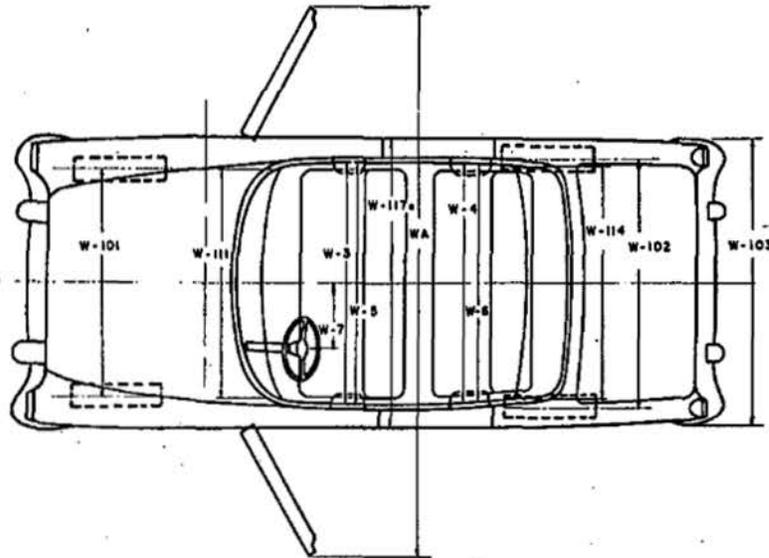


Interior	W3. Front shoulder room, at garnish moulding height or nearest interference 5" forward of seat back.	60.5
	W4. Rear shoulder room, at garnish moulding height or nearest interference 5" forward of seat back.	60.4
	W5. Front hip room, at top of seat 5" forward of vert. tan. to seat back.	63.0
	W6. Rear hip room, at top of seat 5" forward of vert. tan. to seat back.	62.7
	W7. Steering wheel center to center of body.	Manual steering 16.11; Power steering 16.25
Exterior	W101. Front tread at ground.	LD1, LD2 - 61.4; LD3 - 60.9
	W102. Rear tread at ground.	LD1-60.1; LD2-L - 60.2; LD2-M, LD3 - 59.8
	W103. Max. overall width of car including bumpers or mouldings.	78.3
	WA. Max. overall width of car with doors open.	156.8
	W111. Windshield DLO, max. width.	63.2
	W114. Back window DLO, max. width.	60.4
	W117a. Max. body width at center pillar, less hardware and applied moldings.	75.6

AMA Specifications – Passenger Car

Page 24

MAKE OF CAR DODGE MODEL YEAR 1958 DATE ISSUED Sept. 1957 REVISED _____
 LD3-L LD3-H
 MODEL Standard Station Wagon Custom Station Wagon

STATION WAGON—CARGO SPACE DIMENSIONS

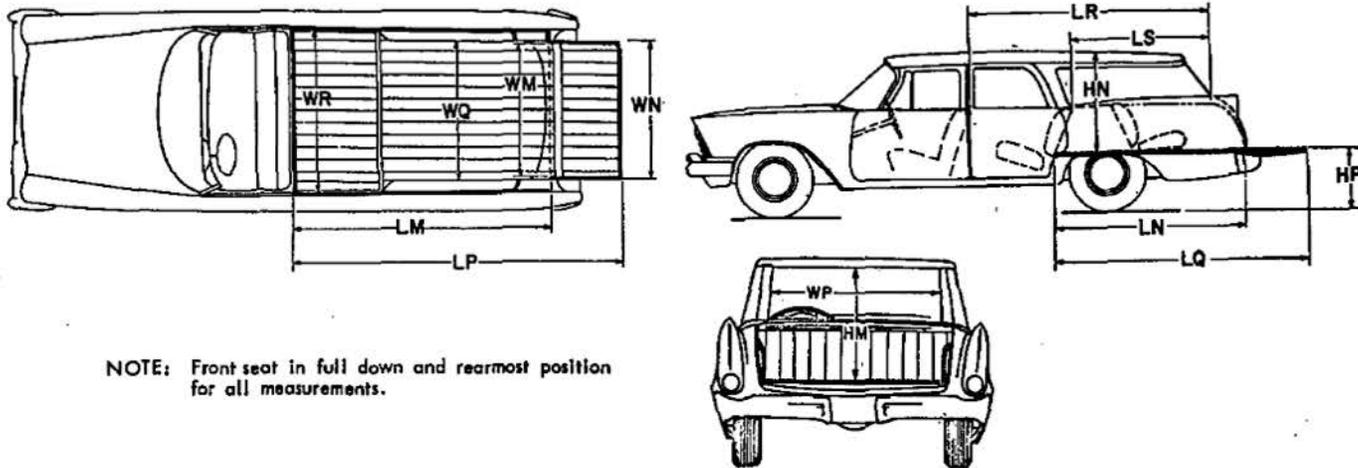

NOTE: Front seat in full down and rearmost position for all measurements.

LM Floor length from bottom of front seat to inside of tail gate in raised position.	98.6
LN Floor lgth. from bottom of second seat to inside of tail gate in raised position.	64.5
LP Floor lgth. from bottom of front seat to end of tail gate in lowered position.	119.7
LQ Floor lgth. from bottom of second seat to end of tail gate - tail gate lowered.	85.6
HM Maximum hght. of rear opening - tail gate lowered.	28.5
WM Rear end opening width at floor.	46.0
WN Rear end opening width at top of tail gate.	50.7
WQ Minimum distance between wheelhouses.	45.7
WP Maximum width of rear opening above raised tail gate.	48.0
WR Maximum width of cargo space at floor.	62.5
LR Cargo horizontal distance from top rear of front seat back to top of tail gate.	81.7
LS Cargo horizontal distance from top rear of second seat back to top of tail gate.	47.5
HN Maximum height of roof above floor at center line of car.	33.0
HP Platform height of end of lowered tail gate - curb weight.	27.5
Third Seat - facing direction.	Rearward

AMA Specifications - Passenger Car

MAKE OF CAR DODGE **MODEL YEAR** 1958 **DATE ISSUED** Sept. 1957 **REVISED** Jan. 1958 ϕ
MODEL LD1, LD2, and LD3 - All Models

BODY—MISCELLANEOUS INFORMATION

Drs. hinged (front, rear)	Front doors	Front
	Rear doors	Front
Type of finish (lacquer, enamel).		Synthetic enamel
Hood hinge location (front, rear).		Rear
Hood counterbalanced (yes, no).		Yes
Hood release control (internal, external).		External
Vehicle (Serial) No. Location		Bottom left front door hinge post
Engine No. location		Top of engine block - front
Theft protection - type		Ignition-key starting, ignition switch terminal barrier & door locks ϕ
Vent window control method (crank, friction pivot).		Friction pivot
Windshield type (single curved, compound curved, other)		Single curved
Rear window type (flat, curved, one piece, three piece)		One piece - curved
Side glass type (curved, flat)		Flat
Windshield glass area D.L.O.		1444
Backlight glass area D.L.O.		1173
Total glass area D.L.O.		4148

BODY—TYPES AND STYLE NAMES —

Body type, number of passengers & style names; use manufacturer's code for series & body style.

BODY STYLES:	CODES				
	LD1-L	LD2-L	LD2-M	LD3-H	LD3-L
4-Door Sedan		-41, 6-Pass.			---
2-Door Sedan	-21, 6-Pass.		---	---	---
4-Door Hardtop		-43, 6-Pass. Lancer			---
2-Door Hardtop		-23, 6-Pass. Lancer			---
Convertible Coupe	---	-27, 6-Pass. Lancer	---	-27, 6-Pass. Lancer	---
2-Door Station Wagon	---	ϕ	---	---	-25, 6-Pass. ϕ
4-Door Station Wagon	---	---	---	45A, 6-Pass. Custom Sierra	-45A, 6-Pass. Sierra
4-Door Station Wagon	---	---	---	-45B, 9-Pass. Cust. Sierra Spectator	-45B, 9-Pass. Sierra Spectator

AMA Specifications -- Passenger Car

Supplement to

Page 26

Jan.

MAKE OF CAR DODGE MODEL YEAR 1958 DATE ISSUED 1958 REVISED

MAJOR OPTIONAL ITEMS - WEIGHTS

Model	CURB - WEIGHT - POUNDS			% PASS. WEIGHT DISTRIBUTION				SHIPPING * WEIGHT
	Front	Rear	Total	Pass. In Front		Pass. In Rear		
				Front	Rear	Front	Rear	
STANDARD STATION WAGON								
LD3-L-25 2D Subr 2 Seat								3875
-45A 4D Sierra 2 Seat	2040	2090	4130	57.5	42.5	23.5	76.5	3930
-45B 4D Sierra 3 Seat	2040	2160	4200	57.5	42.5	23.5	76.5	3990
CUSTOM ROYAL								
LD3-H-23 2Dr Hardtop	2085	1750	3835	57.5	42.5	26.0	74.0	3610
-27 Conv Coupe	2160	1835	3995	57.5	42.5	26.0	74.0	3785
-41 4Dr Sedan	2080	1780	3860	57.5	42.5	22.0	78.0	3640
-43 4Dr Hardtop	2110	1805	3915	57.5	42.5	22.0	78.0	3670
LD3-H-45A 4Dr Custom								
Sierra 2 Seat	2045	2095	4140	57.5	42.5	23.5	76.5	3955
-45B 4Dr Custom								
Sierra 3 Seat	2045	2165	4210	57.5	42.5	23.5	76.5	4035
Accessories & Equipment Weights								
	Differential Weights			Remarks				
PowerFlite Transmission	+15	+10	+25	LD2 models only				
TorqueFlite Transmission	+30	+20	+50	LD2 and LD3 models				
Radio and Heater	+25	+15	+40	All models				
Power Steering	+30	0	+30	All models, except with manual transmissions				
Power Brakes	+10	+5	+15	All models				
LD3-L-25 D500 Package				Shipping Weight - +20				
-45 D500 Package				Shipping Weight - +5				
LD3-H-All D500 Package				Shipping Weight - +5				

* These weights posted with State tax authorities for licensing purposes only.

AMA Specifications -- Passenger Car

PAGE 27

INDEX

SUBJECT	PAGE NO.	SUBJECT	PAGE NO.
Air Suspension	16	Lamp Bulbs	11
Angles of Approach, Departure	21	Legroom	22
Automatic Transmission	1, 13	Lengths - Car, & Body Interior	1, 22
Axle, Rear	1, 14	Lifters, Valve	4
Battery	8	Linings - Clutch, Brake	12, 15
Bearings, Engine	3, 4, 7	Lubrication	5, 6, 12, 13, 14
Belts - Fan, Generator, Water Pump	7	Motor, Starting	8
Body - General Information, Types	19, 25	Muffler	6
Height Dimensions	21	Overdrive	13
Length Dimensions	22	Piston Pins & Rings	3
Overall Dimensions	1, 21, 22, 23	Pistons	2, 3
Trunk Capacities, Opening Dimensions	19	Power Brakes	15
Width Dimensions	23	Power Steering	17
Brakes - Parking, Service, Power	15, 16	Propeller Shaft, Universal Joints	14
Camber	18	Pumps - Oil, Fuel	6
Camshaft	4	Water	7
Capacities		Radiator, Hoses	7
Cooling System	7	Ramp Break-over Angle	21
Fuel Tank	6	Ratios - Axle	1, 14
Lubricants		Compression	1, 2
Engine Crankcase	6	Steering	17
Transmission and Overdrive	12, 13	Transmission	12, 13
Rear Axle	15	Rear Axle	1, 14
Carburetor	6	Regulator - Generator	8
Caster	18	Rims	15
Choke, Automatic	6	Rings, Piston	3
Circuit Breakers, Fuses	11	Rods - Connecting	3
Clearance, Ground	21	Shock Absorbers, Front & Rear	16
Clutch - Pedal Operated	12	Spark Plugs	9
Coil, Ignition	9	Speedometer	10
Connecting Rods	3	Springs - Front & Rear Suspension	17, 18
Cooling System	7	Valve, Engine	5
Crankshaft	4	Stabilizer (Sway Bar) - Front & Rear	17, 18
Cylinders and Cylinder Head	2	Starting Motor	8
Distributor - Ignition	9	Steering	17, 18
Electrical System	8, 9, 10, 11	Suppression - Ignition, Radio	9
Engine		Suspension - Front & Rear	16, 17, 18
Bore, Stroke, Displacement, Type	1, 2	Switches	10
Compression Ratio	1, 2	Tailpipe	6
Firing Order, Cylinder Numbering	2, 9	Thermostat, Cooling	7
General Information, H.P. & Torque	1, 2	Timing, Engine & Valve	4, 5, 9
Lubrication	5, 6	Tires	1, 15
Exhaust System	6	Toe in	18
Fan, Cooling	7	Torque Converter	13
Filters - Engine Oil, Fuel System	6	Torque - Engine, Rated	1, 2
Frame	16	Transmission - Types	1, 12, 13
Front Suspension	16, 17	Automatic	1, 13
Fuel, Fuel Pump, Fuel System	6	Manual & Overdrive	12, 13
Fuel Injection	1, 6	Ratios	12, 13
Fuses, Circuit Breakers	11	Tread	1, 23
Generator and Regulator	8	Turning Diameter	17
Glass	21, 23, 25	Universal Joints, Propeller Shaft	14
Headroom - Body	20	Valves - Intake & Exhaust	4, 5
Heights - Car & Body	1, 20, 21	Vibration Damper	4
Hood	25	Voltage Regulator	8
Horns	10	Water Pump	7
Horsepower - Brake, Rated, Taxable	1, 2	Weights - Shipping, Curb	26
Ignition System	9	Wheel Alignment	18
Inflation - Tires	15	Wheelbase	1, 22
Instruments	6, 10	Wheels & Tires	15
Kingpin	18	Wheel Spindle	18
		Widths - Car & Body	1, 23
		Windshield	21, 23, 25
		Windshield Wiper	10